

WALLACE FORGE COMPANY



King Pins, Pintle Hooks, Drawbar Eyes
Manufactured in the United States

Edition 24

Item	Page	Item	Page
King Pins	3-6	Towing Accessories	
Pintle Hooks		Triple Ball Hitch	38
Spring Mounted	7-8	High Low Bars	39-40
Swivel Mounted	8-10	Receiver Tube Reducer	41
Rigid Mounted	10-17	Hitch Balls	42
Coupling Products		Bent Hitch Pins	43
Ball Couplers	18-20	Receiver Tubes	43
Channel	20	Receiver Adapters	44
Dual Purpose Hitches	21-24	Tow Hooks	45-46
Nose Plates	26	Snapper Pins	46
Gooseneck Couplers	24-26	Trailer Accessories	
King Pin on Pipe	26	Safety Chain Retainer	47
Tow Rings	27-33	D-Rings	48
Clevis	33	Hitch Pins	50
Master Links	34	Jacks	50-51
Dump Body Accessories		Floor Clip	53
Grab Hooks	34	Lashing Rings	53-54
Hinge Assemblies	34	Linch Pins	55
Mounting Blocks	34	Outriggers	52
Banjo Eyes	34	Spring Latches	56-57
Door Hinges	34	Tie Downs	57
Hand Grips	34		
Steps	34		
Tailgate Latch Assemblies	36-37		

Since 1942, Wallace Forge has been developing quality products in the trucking industry to satisfy our customers, and expand the industry.

3700 Georgetown St. N.E.
Canton, Ohio 44704

Toll Free: (800) 328 1203
Phone: (330) 488 1203
Fax: (330) 488 1217

www.WallaceForgeCompany.com
sales@WallaceForgeCompany.com



SMITHERS
QUALITY ASSESSMENTS

Wallace Forge Company has been assessed and approved by Smithers Quality Assessments, Inc., to **ISO 9001:2015** quality management system standards and requirements.



King Pins

 All Wallace Forge King Pins are 100% American made.

Forged out of an AISI 8630 or 4320 material, depending on the model, Wallace Forge's King Pins conform to all SAE and AAR standards. Every one of our King Pins is 100% Brinell hardness checked, magnetic particle inspected and weldable. See website for install instructions, and bracing recommendations.

Wallace Forge Company King Pin Information

Standard SAE dimensional tolerances apply to all dimensions.
King Pins are made from 8630 alloy steel and heat treated to 302-363 Brinell, unless otherwise noted.

Wallace Forge King Pins will hold approximately 150,000 PSI ultimate and 115 PSI yield strength.

ALL KING PINS ARE 100% BRINELL HARDNESS CHECKED, MAGNETIC PARTICLE INSPECTED, AND WELDABLE.

Rockwell reading may be different as there may be some surface carbonization.

A Style King Pins

- Forged out of 8630 Alloy Steel



	Part #	Model	Upper Coupler Thickness	Weight
	2084192	KP-25-A	0.25"	14
	2084193	KP-31-A	0.31"	14
	2084194	KP-38-A	0.38"	14
	2084195	KP-50-A	0.50"	14
	2084197	KP-62-A	0.62"	15
	2084196	KP-75-A	0.75"	15

	Part #	Drilled Model	Upper Coupler Thickness	Weight
	2084192H	KP-25-D	0.25"	14
	2084193H	KP-31-D	0.31"	14
	2084194H	KP-38-D	0.38"	14
	2084195H	KP-50-D	0.50"	14
	2084197H	KP-62-D	0.62"	14
	2084196H	KP-75-D	0.75"	14

*



2084192

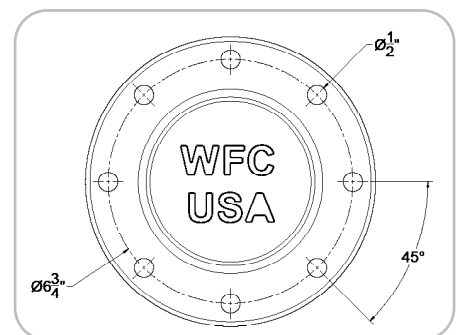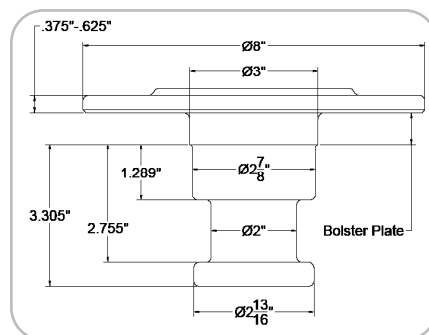

Drilled King Pin Layout

Wallace Forge King Pins are not for off the road equipment. Galvanizing King Pins changes the temperment and dimensions of a King Pin. Galvanizing voids the warranty.

Warning: The use of a lube plate alters the king pin dimensions from SAE standards and may prevent proper coupling.

B & C Style King Pins


- Forged out of 8630 Alloy Steel
- Available in 4320H Steel Minimum Order Quantities May Apply*

These King Pins are also known as Double Spool King Pins.

Part #	Model	Dimensions				Wt.
		A	B	C	D	
 2085196	KP-25-B	2.125"	0.25"	0.38-0.58"	2.875"	19
 2085197	KP-31-B	2.125"	0.31"	0.38-0.58"	2.875"	19
 2085198	KP-38-B	2.125"	0.38"	0.38-0.58"	2.875"	19
 2085199	KP-50-B	2.125"	0.5"	0.38-0.58"	2.875"	19
 2085200	KP-25-C	1.500"	0.25"	0.38-0.58"	2"	17
 2085201	KP-31-C	1.500"	0.31"	0.38-0.58"	2"	17
 2085202	KP-38-C	1.500"	0.38"	0.38-0.58"	2"	17
 2085203	KP-50-C	1.500"	0.5"	0.38-0.58"	2"	17



2085196

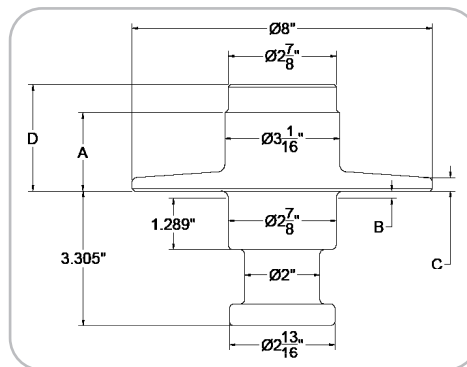

3 1/2" Heavy Duty King Pins



- Forged out of 8630 Alloy Steel
- Heat-Treated to Brinell 302-363

These King Pins are for off the road equipment and heavy duty trucks.
Drilled models feature four 1.25 inch holes on a diameter of 8.50 inch.

Part #	Model	Bolster Plate Thickness (B)	Wt.
 2393162	KP 848-38	0.38"	43
 2394163	KP 848-50	0.50"	43
 2393162D	KP 848-38 Drilled	0.38"	42
 2394163D	KP 848-50 Drilled	0.50"	42



2393162

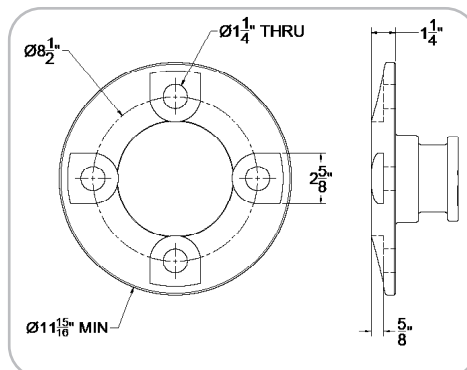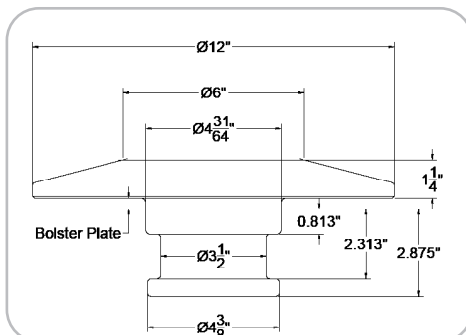


2393162D

Cruciform King Pins

- Forged out of 4320H Steel
- Heat-Treated to Brinell 380-420

These King Pins meet all the requirements of the Association of the American Railroads, AAR, Standard M-931 when installed properly.

Part #	Model	Bolster Plate Thickness	Dimension				Wt.
			A	B	C	D	
 2401170	KP-25-AR	0.25"	1.558"	3.012"	3.574"	2.437"	17
 2402171	KP-31-AR	0.31"	1.62"	3.074"	3.636"	2.437"	17
 2401172	KP-38-AR	0.38"	1.683"	3.137"	3.699"	2.437"	17
 2402050	KP-25-ARM	0.25"	1.558"	3.012"	3.574"	3.125"	18
 2402075	KP-31-ARM	0.31"	1.62"	3.074"	3.636"	3.125"	18
 2402100	KP-38-ARM	0.38"	1.683"	3.137"	3.699"	3.125"	18
 2401180	KP-25-AAR	0.25"	1.558"	3.012"	3.574"	3.625"	19
 2401182	KP-31-AAR	0.31"	1.62"	3.074"	3.636"	3.625"	19
 2401181	KP-38-AAR	0.38"	1.683"	3.137"	3.699"	3.625"	19

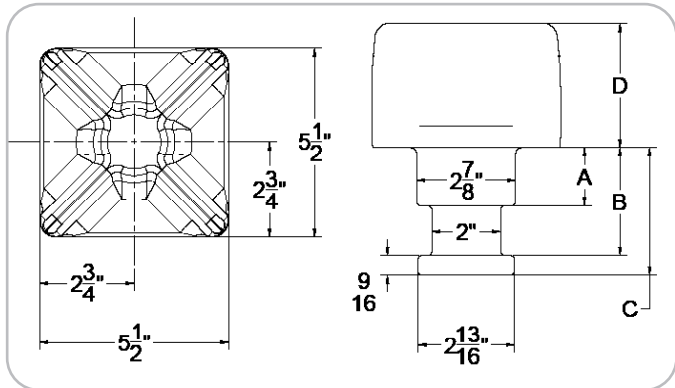

KP-25-AAR

L Style King Pins

- Forged out of 4320H Steel
- Heat-Treated to Brinell 380-420

These King Pins meet all the requirements of the Association of the American Railroads, AAR, Standard M-931 when installed properly




Part #	Model	Bolster Plate Thickness (B)	Wt.
 2085025	KP-25-AAR-L	0.25"	13
 2085031	KP-31-AAR-L	0.3125"	13
 2085038	KP-38-AAR-L	0.375"	13



Drilled King Pin Assembly

Complete Assembly with backing plate and mounting bolts.
Drilled assembly allows for easy king pin replacement.


Part #	Model	Bolster Plate Thickness (B)	Wt.
 2083181	KP-25-DA	0.25"	33
 2083182	KP-31-DA	0.3125"	33
 2083183	KP-38-DA	0.375"	33
 2083184	KP-50-DA	0.50"	33

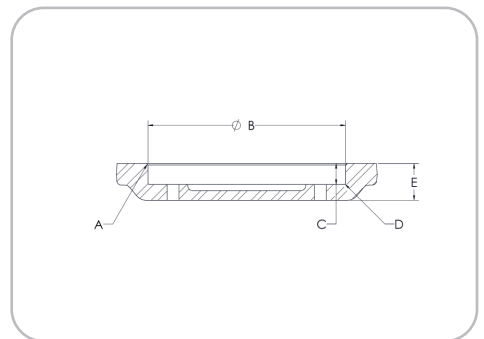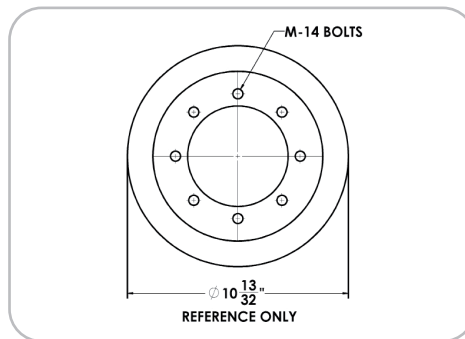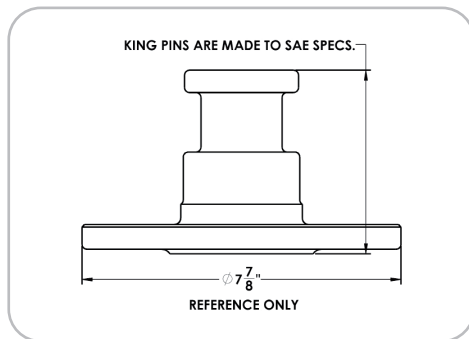

Drop In King Pin

Removeable king pin with 5/8" D-Ring and clip welded on for King Pin removal.


Part #	Wt.
 51192003	20
 51192005	20

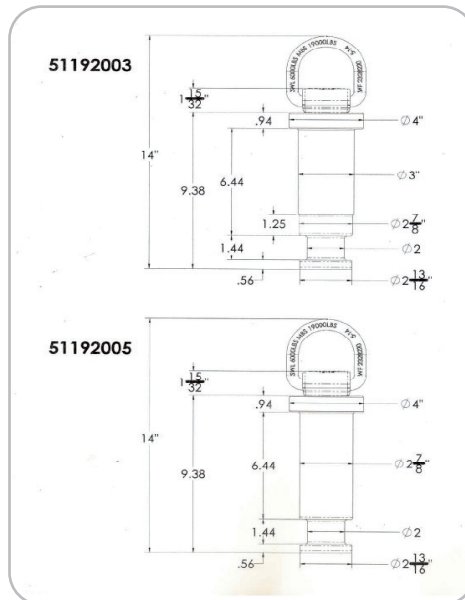

Gooseneck King Pin Adapter

Standard 2-5/16" or 3" Ball on one side and standard 2" King Pin on the other side. Fifth wheel must be in upright locked position.

Part #	Ball Diameter	Max Capacity G.T.W.	Wt.
 2085295	2 5/16"	30,000	16
 2085293	3"	31,000	17



The King Pin Lock comes with 2 keys, please specify key number.
King Pin wear gauge designed to monitor king pin wear, and straightness to plate.



King Pin Lock




All the below Pintle Hooks are used in the Utility and Municipality Industry for over the road and off the road equipment. For use with drawbar eye dimensions: 2 $\frac{3}{8}$ " to 3" eye with a ring diameter of 1 $\frac{1}{4}$ " to 1 $\frac{5}{8}$ ". *Install with Grade 8 bolts and mount to a plate with a minimum thickness of $\frac{3}{4}$ ".*




15 Ton Spring



25 Ton Spring

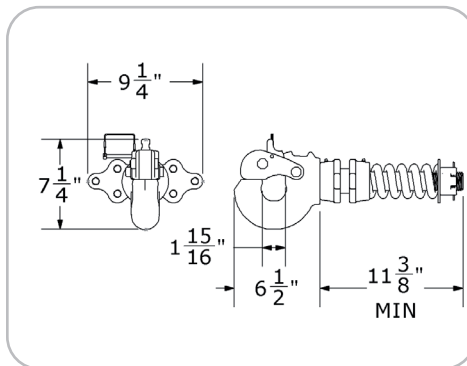

25 Ton Spring

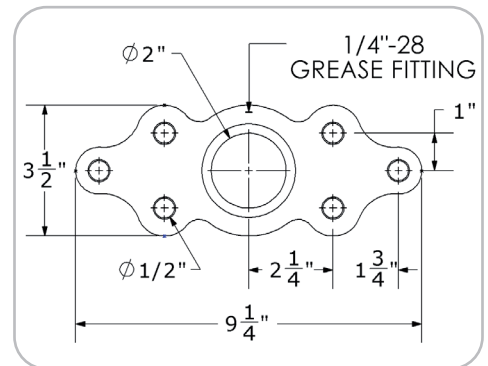

Mounting Bracket

For all products: to prevent personal injury or vertical damage, the mounting location must be capable of supporting at least 15% more than the maximum amount to be pulled.

T-Bracket Spring Mounted Pintle Hooks


All the below Pintle Hooks are used in the Utility and Municipality Industry for over the road and off the road equipment. For use with drawbar eye dimensions: $2\frac{3}{8}$ " to 3" eye with a ring diameter of $1\frac{1}{4}$ " to $1\frac{5}{8}$ ". Install with Grade 8 bolts and mount to a plate with a minimum thickness of $\frac{3}{4}$ ".




T-15 Ton Pintle Hook




T-25 Ton Pintle Hook

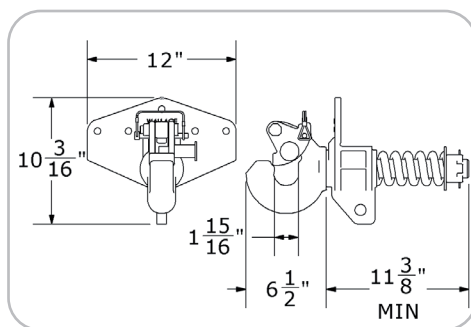

T-15 Ton

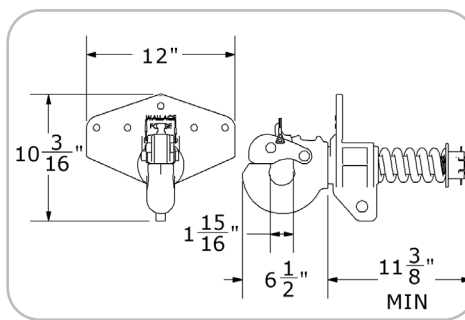

T-25 Ton

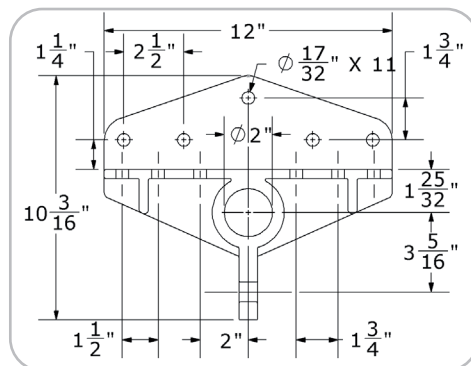

T-Bracket

Replacement Parts

Part #	Description
2089176	15 Ton Latch Assembly
2090177	25 Ton Latch Assembly
2099178	15 Ton- Snapper Pin, S-Hook and Chain for Latches
2099179	25 Ton-Snapper Pin, S-Hook and Chain for Latches
2097187	15/25 Ton Cushion Spring


Wallace Forge is not liable if pintle hooks are welded or modified.

B-8 Swivel Mounted Pintle Hook


These Pintle Hooks are recommended for off the road equipment and are used with a drawbar with an eye diameter of 2 $\frac{3}{8}$ " to 3".

	Part #	Model	Max Capacity		Wt.
			G.T.W.	V.L.	
	2047104	B-8 with Brackets	18,000	2,000	15
	2052109	NB-8 No Brackets	18,000	2,000	10

All military products must be individually quoted

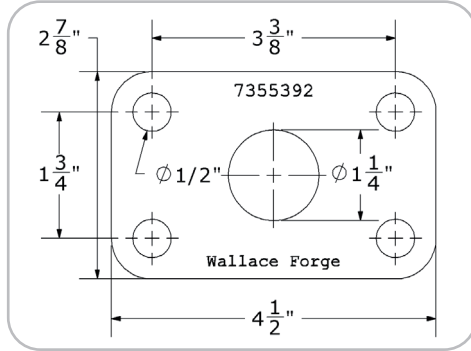

Brackets

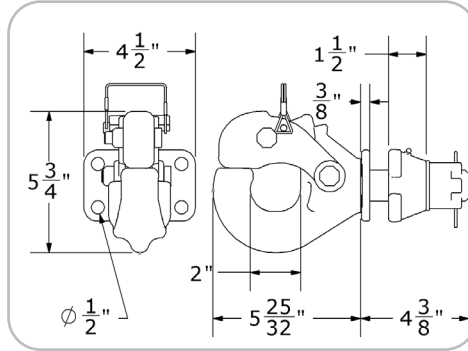


B-8

B-8 Replacement Parts

Part #	Description
2088175	Latch Assembly
2382151	Snapper Pin, S-Hook and Chain for Latches




B-8 with Brackets




B-8 No Brackets

Swivel Mounted Pintle Hooks

	Part #	Model	Max Capacity		Wt.
			G.T.W.	V.L.	
	2048105	B-15 Ton	30,000	4,000	27
	2049106	B-25 Ton	50,000	6,000	28

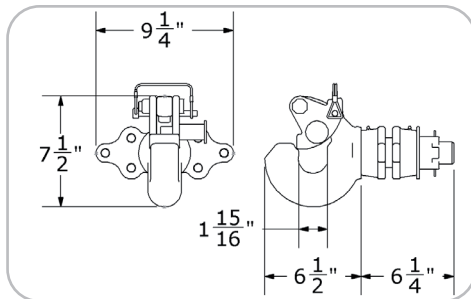

B-15 Ton

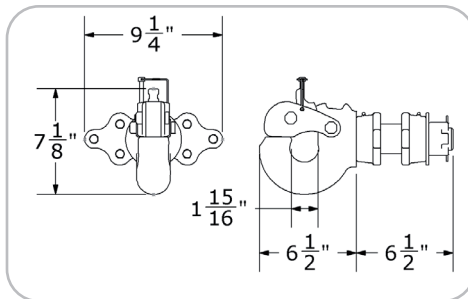

B-25 Ton

15 Ton Replacement Parts

Part #	Description
2089176	15 Ton Latch Assembly
2097187	Cushion Spring
2102189	Mounting Brackets (Pair)
2099178	15 Ton- Snapper Pin, S-Hook and Chain for Latches

25 Ton Replacement Parts

Part #	Description
2090177	25 Ton Latch Assembly
2097187	Cushion Spring
2102189	Mounting Brackets (Pair)
2099179	25 Ton-Snapper Pin, S-Hook and Chain for Latches



B-15 Ton



B-25 Ton

B-30 Swivel Mounted Pintle Hook

These Pintle Hooks are to be used with a drawbar with a 3" diameter eye and a ring thickness 1 $\frac{5}{8}$ ". Mounting holes are 6 $\frac{1}{2}$ " from center to center and accept 3 $\frac{3}{4}$ " Grade 8 bolts.





Part #	Model	Max Capacity		Wt.
		G.T.W.	V.L.	
 2050107	B-30	60,000	12,200	38
 2053110	NB-30 No Mounting Brackets	60,000	12,200	28

All military orders must be quoted, when referencing please use part number AA-52550-2.

30 Ton Replacement Parts

Part #	Description
2091178	Latch Assembly
2103190	Mounting Brackets (Pair)
2056175	Snapper Pin, S-Hook and Chain for Latch

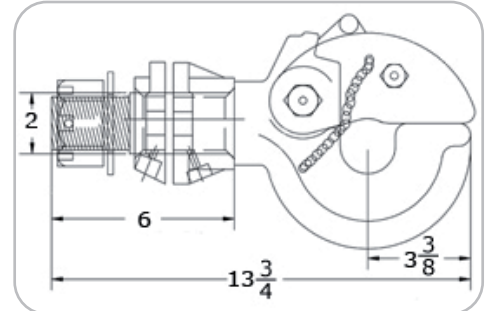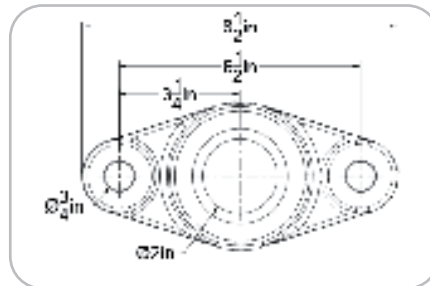

B-50 Swivel Pintle Hook


These Pintle Hooks are to be used with a drawbar with a 3" diameter eye and a ring thickness 1 $\frac{5}{8}$ ". The mounting holes accept 1 $\frac{5}{16}$ " bolts.



2051108

Part #	Model	Max Capacity		Wt.
		G.T.W.	V.L.	
 2051108	B-50	100,000	20,000	61
 2054111	NB-50 No Mounting Brackets	100,000	20,000	42

All military orders must be quoted, when referencing please use part number AA-52550-3.

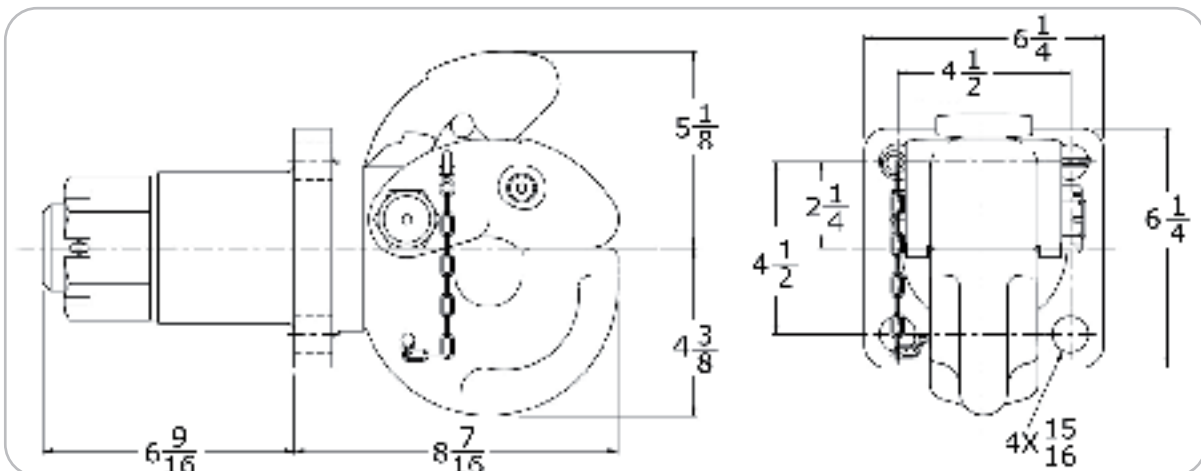

50 Ton Replacement Parts

Part #	Description
2093180	Latch Assembly
2104191	Mounting Bracket
2049340	Snapper Pin, S-Hook and Chain for Latch

Rigid Mount Pintle Hooks


These Pintle Hooks are to be used with a drawbar with a 2 $\frac{3}{8}$ "-3" diameter eye.



Part #	Model	Dimensions	Max Capacity		Wt.
		A	G.T.W.	V.L.	
IQ09331	R-5 Ton	1/2"	10,000	2,000	8
 2055125	R-10 Ton	1/2"	20,000	4,000	8.5
 2056113	R-15 Ton	1/2"	30,000	6,000	11
2056114	R-15 Ton	1/2"	30,000	6,000	11
 2057114	R-20 Ton	9/16"	40,000	8,000	12.25

Rigid Mount Pintle Hook Replacement Parts

Part #	Description
2105205	Latch
2382151	Snapper Pin, S-Hook and Chain for Latches
2117240	R-5, R-8 and R-15 Ton Mounting Kit
2117242	R-20 Mounting Kit

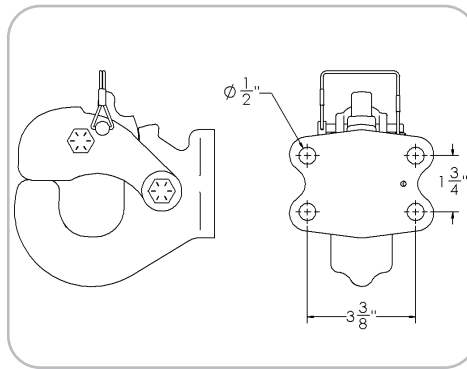

R-30 Ton Rigid Mount Pintle Hook


These Pintle Hooks are to be used with a drawbar with a 2 $\frac{3}{8}$ "-3" diameter eye.



Part #	Model	Max Capacity		Wt.
		G.T.W.	V.L.	
 2058115	R-30 Ton	60,000	15,000	24

R-30 Ton Pintle Hook Replacement Parts

Part #	Description
2089176	Latch Assembly

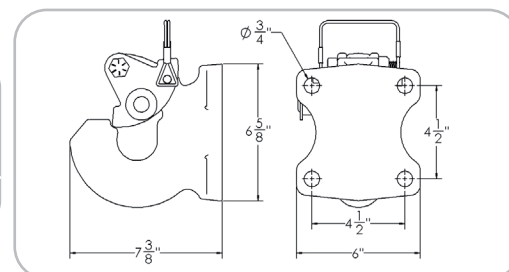

Do not weld or modify Wallace Forge Company Pintle Hooks.

Rigid Pintle Hook Capacities are reduced by 25% when used for Off the Road Purposes.

50 Ton 4 Bolt Pintle Hook

These Pintle Hooks are to be used with a drawbar with a $2\frac{3}{8}$ " to 3" diameter eye and a ring thickness $1\frac{1}{4}$ " to $1\frac{5}{8}$ ". The mounting plate should be at least $\frac{7}{8}$ " thick.



R-50 Ton 4B


	Part #	Model	Max Capacity		Wt.
			G.T.W.	V.L.	
	2354100*	R-50 Ton WR 4B Complete	100,000	20,000	45
	2354125	R-50 Ton WR 4B No air	100,000	20,000	30
	2354100-C	R-50 Ton WR 4B Complete with mounting bolts	100,000	20,000	48

*Includes air cylinder, mounting bracket

2354100 and 2354125 will be replacing 2354454 and 2354454S. These parts offer $\frac{3}{4}$ " holes instead of $\frac{7}{8}$ " and longer service life.



R-50 Ton 4B No air

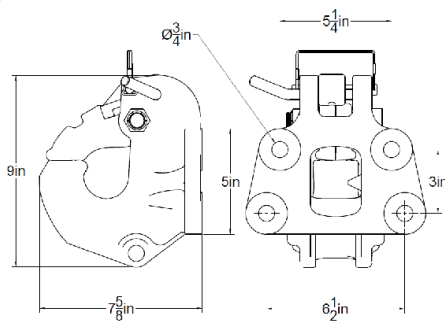

4 Bolt Rigid Mount Hook Replacement Parts

Part #	Description
54454L	Latch Assembly
23454P	Plunger Arm
23454T	Thimble for Air Cylinder
23454MB	Mounting Bracket
23454AC	Air Cylinder

60 Ton 4 Bolt Pintle Hook

These Pintle Hooks are to be used with a drawbar with a $2\frac{3}{8}$ " to 3" diameter eye and a ring thickness $1\frac{1}{4}$ " to $1\frac{5}{8}$ ". The mounting plate should be at least $\frac{7}{8}$ " thick.



	Part #	Model	Max Capacity		Wt.
			G.T.W.	V.L.	
	2354355S	R-60 Ton 4B No Air	120,000	24,000	40
	2354355	R-60 Ton 4B Complete	120,000	24,000	60
	2354355-C	R-60 Ton 4B Complete with Mounting Bolts	120,000	24,000	62

Do not weld or modify Wallace Forge Company Pintle Hooks.

Rigid Pintle Hook Capacities are reduced by 25% when used for Off the Road Purposes.

50 Ton 6 Bolt Pintle Hook


These Pintle Hooks are to be used with a drawbar with a $2\frac{3}{8}$ " to 3" diameter eye and a ring thickness $1\frac{1}{4}$ " to $1\frac{5}{8}$ ". The mounting plate should be at least $\frac{7}{8}$ " thick.



	Part #	Model	Max Capacity		Wt.
			G.T.W.	V.L.	
	2058214	R-50 Ton 6B No Air	100,000	20,000	40
	2058210	R-50 Ton 6B CPLT	100,000	20,000	60
	2058211-C	R-50 Ton 6B CPLT Bolts	100,000	20,000	62

50 Ton 6 Offset Bolt Pintle Hook Replacement Parts

Part #	Description
2091176	Latch Assembly
2058P	Plunger Arm
2058T	Thimble for Air Cylinder
2715MB	Mounting Bracket
2060AC	Air Cylinder

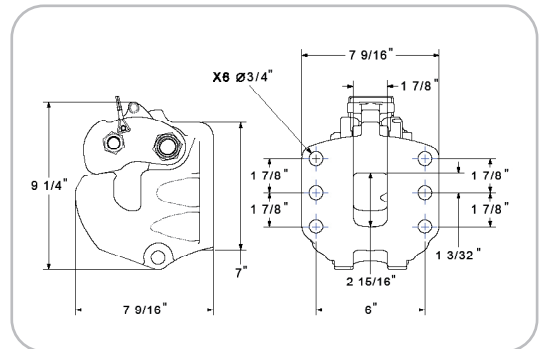

50 Ton 6 Bolt Pintle Hook

These Pintle Hooks are to be used with a drawbar with a $2\frac{3}{8}$ " to 3" diameter eye and a ring thickness $1\frac{1}{4}$ " to $1\frac{5}{8}$ ". The mounting plate should be at least $\frac{7}{8}$ " thick. *There are two different bolt patterns for the Pintle Hooks, please see drawings.*




	Part #	Model	Max Capacity			Wt.
			Latch	G.T.W.	V.L.	
	2060117NA	R-50 Ton 6-B No Air	60,000	100,000	20,000	40
	2060117*	R-50 Ton 6-B	60,000	100,000	20,000	60

*Include air cylinder, brackets, bolts

50 Ton 6 Bolt Pintle Hook Replacement Parts

Part #	Description
2091176	Latch Assembly
2060P	Plunger
2096183	Mounting Bracket
2060AC	Air Cylinder

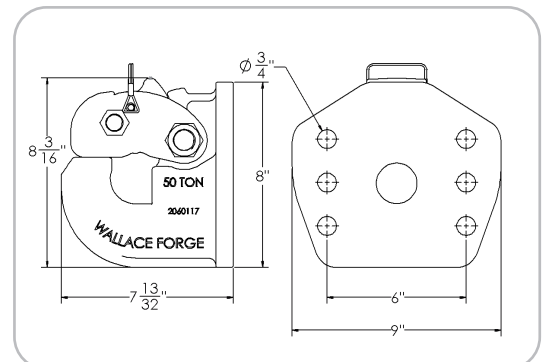

2060117

Do not weld or modify Wallace Forge Company Pintle Hooks.

50 Ton Offset 6 Bolt Pintle Hook


These Pintle Hooks are to be used with a drawbar with a 2 $\frac{3}{8}$ " to 3" diameter eye and a ring thickness 1 $\frac{1}{4}$ " to 1 $\frac{5}{8}$ ". The mounting plate should be at least $\frac{7}{8}$ " thick.



Part #	Description	Max Capacity			Wt.
		Latch	G.T.W.	V.L.	
 2060115	Pintle Hook only	60,000	100,000	20,000	40
 2059117	Pintle Hook, brackets, bolts	60,000	100,000	20,000	47
 2058116	50 Ton Offset 6 Bolt complete	60,000	100,000	20,000	60

50 Ton 6 Offset Bolt Pintle Hook Replacement Parts

Part #	Description
2091176	Latch Assembly
2060P	Plunger
2096183	Mounting Bracket
2060AC	Air Cylinder

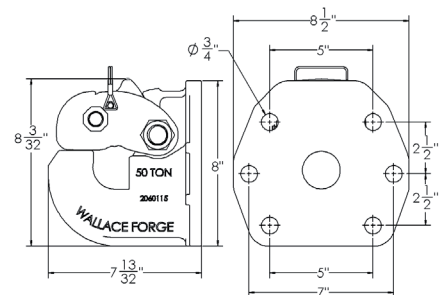

R-50 Pintle Hook


These Pintle Hooks are to be used with a drawbar with a 2 $\frac{3}{8}$ " to 3" diameter eye and a ring thickness 1 $\frac{1}{4}$ " to 1 $\frac{5}{8}$ ". The mounting plate should be at least $\frac{7}{8}$ " thick.



Part #	Model	Max Capacity		
		Latch	G.T.W.	V.L.
 2058011	R50T-6 Complete without mounting bolts	60,000	100,000	20,000
 2058012	R50T-6 - Pintle Hook Only	60,000	100,000	20,000
 2058010	R50T-6 Complete with mounting bolts	60,000	100,000	20,000

R-50-6 Pintle Hook Replacement Parts

Part #	Description
2091176	Latch Assembly
2391P	Plunger
2715MB	Mounting Bracket
T-24	Air Cylinder

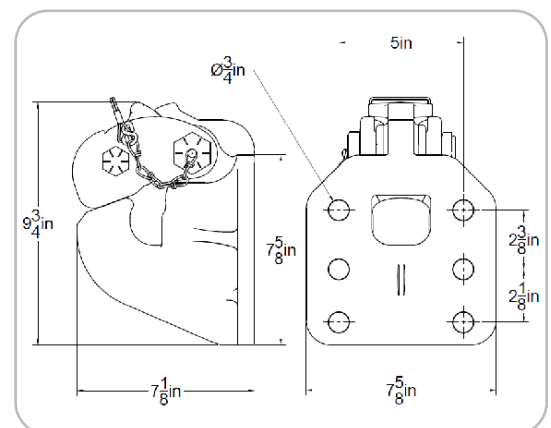


R-50 Pintle Hook

These Pintle Hooks are to be used with a drawbar with a 2¾" to 3" diameter eye and a ring thickness 1¼" to 1⅝". The mounting plate should be at least ⅞" thick. Maximum Latch Capacity: 60,000 LBS.




R-50-10 Bolt with Air Chamber

Part #	Model	Max Capacity		WT.
		G.T.W.	V.L.	
 2391168	R-50-WR8 Bolt no air cylinder	100,000	20,000	46
 2391167	R-50-WR8 Bolt Complete without mounting bolts	100,000	20,000	56
 2391161	R-50-WR10 Bolt no air cylinder	100,000	20,000	46
 2391162	R-50-WR10 Bolt Complete without mounting bolts	100,000	20,000	56

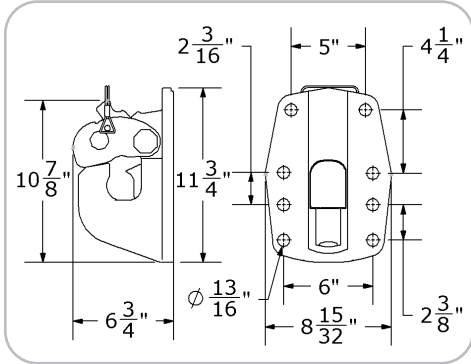

R-50-8 Bolt

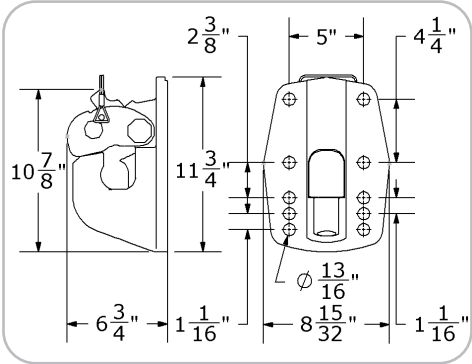

R-50-10 Bolt

R-50-8/R-50-10 Pintle Hook Replacement Parts

Part #	Description
2091176	Latch Assembly
2391P	Plunger
2715MB	Mounting Bracket
T-24	Air Cylinder

50 Ton 10 Bolt Pintle Hook

This pintle hook features an integrated plunger for simple aftermarket replacement. These Pintle Hooks are to be used with a drawbar with a 2 $\frac{3}{8}$ " to 3" diameter eye and a ring thickness 1 $\frac{1}{4}$ " to 1 $\frac{5}{8}$ ". The mounting plate should be at least $\frac{7}{8}$ " thick.


	Part #	Model	Max Capacity		Wt.
			G.T.W.	V.L.	
	2391070	R-50 Ton WR 10B No Air	100,000	20,000	40
	2391171	R-50 Ton 10B WR Complete	100,000	20,000	60
	2391171-C	R-50 Ton 10B WR Complete with Mounting Bolts	100,000	20,000	62



R-50-10 Bolt with Air Chamber

50 Ton 6 Offset Bolt Pintle Hook Replacement Parts

Part #	Description
2091176	Latch Assembly
2171P	Plunger Arm
2171T	Thimble for Air Cylinder
2096183	Mounting Bracket
2060AC	Air Cylinder

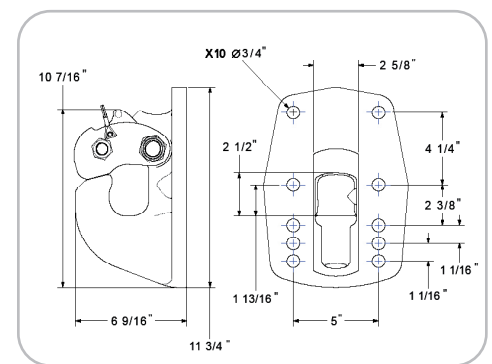

R-50-10

R-75 Ton Pintle Hook


Designed for heavy duty off the road use.

	Part #	Model	Max Capacity		
			Latch	G.T.W.	V.L.
	2075012	R-75 Ton WR Complete with Mounting Bolts	60,000	150,000	30,000
	2075011	R-75 Ton WR Complete No Mounting Bolts	60,000	150,000	30,000



R-75 Ton Pintle Hook Replacement Parts

Part #	Description
2093180	Latch Assembly
2391P	Plunger
2075012MBF	Mounting Bracket
T-30	Air Cylinder

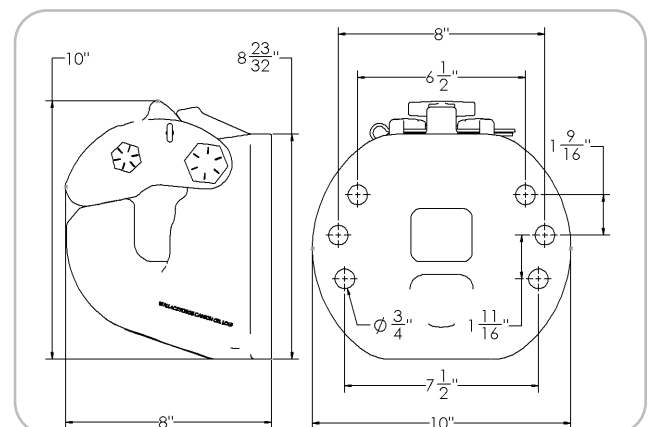


6 Bolt Bumper Mount

- Bottom mount air chamber
- These couplers are weldable and are NOT for off the road use.



Part #	Model	Max Capacity		
		Latch	G.T.W.	V.L.
 2390201	6 Bolt Bumper Mount Complete	20,000	90,000	18,000
 2390212	6 Bolt Bumper Mount without Air Chamber	20,000	90,000	18,000
 2390213	6 Bolt Bumper Mount Complete with Mounting Bolts	20,000	90,000	18,000

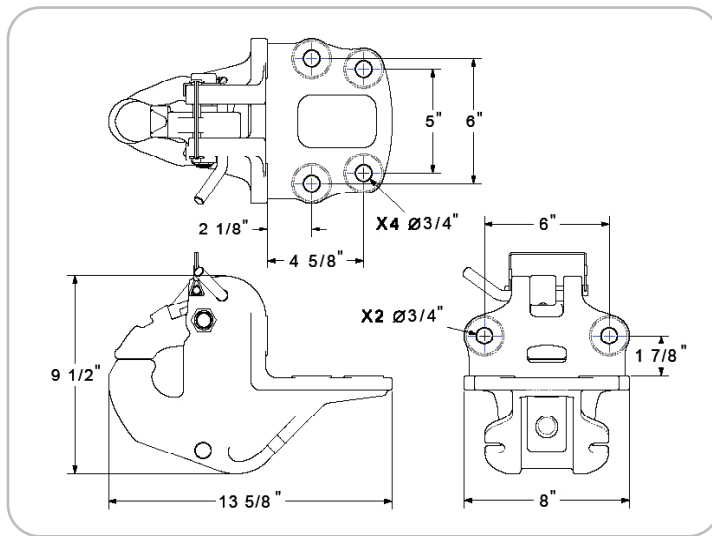


Drop Horn Pintle Hook

Heat-treated for maximum wear resistance.



Part #	Model	Max Capacity		WT.
		G.T.W.	V.L.	
 2375401-L	DHPH Left Handle Orientation	90,000	18,000	
 2375401-R	DHPH Right Handle Orientation	90,000	18,000	

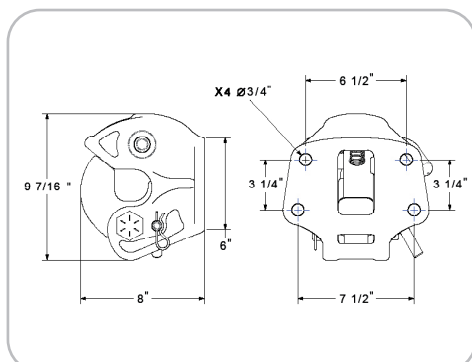

ABM Adjustable Couplers

Coupler fits with Wallace Forge Company Channels, Coupler's holes drilled 2" apart from the center of the holes. Use Grade 8- $\frac{5}{8}$ " bolts.



	Part #	Model	Ball Size	Max Capacity		Wt.
				G.T.W.	V.L.	
	2402178	ABM-200 L	1 $\frac{7}{8}$ " & 2"	10,000	1,000	12
	2402179	ABM-2516 L	2 $\frac{5}{16}$ "	12,000	1,200	12

Light Duty Adjustable Ball Coupler

These couplers' inner parts are heat treated. The couplers come with $\frac{3}{8}$ " detent pins for added safety. Coupler fits with Wallace Forge Company Channels, Coupler's holes drilled 2" apart from the center of the holes.



Part #	Ball Size	Bolt Size	Max Capacity		Wt.
			G.T.W.	V.L.	
2422001	2"	$\frac{5}{8}$ "	10,000	1,000	9.5
2425160	2 $\frac{5}{16}$ "	$\frac{5}{8}$ "	14,000	1,400	9.5

ABM Coupler Replacement Parts

Part #	Description
2405189	Loop Latch Assembly

Adjustable Ball Coupler Replacement Parts

Part #	Description
DTHP3840	Detent Pin

TO AVOID INJURY – PLEASE READ CAREFULLY

1. Follow D.O.T. regulations for installation.
2. Do not modify or add to product.
3. Use grade 8 bolts for mounting with proper torque.
4. Inspect before operating for wear, deformation, damaged or missing parts and secure mounting.
5. FOR ALL PRODUCTS: To prevent personal injury or damage, the mounting location must be capable of supporting 15% more than the maximum amount to be pulled.
6. Do not exceed maximum capacity of product
7. Use safety chains of proper capacity in conjunction with all towing devices at all times.
8. Secure latch in closed position with safety pin inserted. Do not operate without safety pin in place, on pintle hooks and couplers.
9. Use pintle hook with proper lunette.
10. Products in our catalog are NOT for lifting.

Medium Duty Adjustable Coupler

- Available for 2" and 2⁵/₁₆" hitch balls
- Auto-locking style provides easy attachment

Coupler fits with Wallace Forge Company Channels, Coupler's holes drilled 2" apart from the center of the holes.



	Part #	Ball Size	Bolt Size	Max Capacity		Wt.
				G.T.W.	V.L.	
	R20000	2"	5/8"	12,000	1,200	12
	R25160	2 ⁵ / ₁₆ "	5/8"	20,000	2,000	12.75

20,000 Adj. Coupler Replacement Parts

Part #	Description
R20000R	R20000 Latch
R25160R	R25160 Latch

Heavy Duty Adjustable Coupler

- For 2⁵/₁₆" hitch balls only
- Accepts three 5/8" bolts

All three holes must be used to achieve 25,000 lb. capacity. Coupler fits with Wallace Forge Company Channels, Coupler's holes drilled 2" apart from the center of the holes.



	Part #	Ball Size	Bolt Size	Max Capacity		Wt.
				G.T.W.	V.L.	
	R25163	2 ⁵ / ₁₆ "	5/8"	25,000	2,500	16

14,000 Lb. Rigid Mount Coupler

This coupler's inner parts are heat treated. The coupler comes with 3/8" detent pins for added safety.

	Part #	Ball Size	Bolt Size	Max Capacity		Wt.
				G.T.W.	V.L.	
	242000R	2"	5/8"	10,000	1,000	10
	242516R	2 ⁵ / ₁₆ "	5/8"	14,000	1,400	10



14,000 Lb. Rigid Mount Coupler Replacement Parts

Part #	Description
DTHP3840	Detent Pin

ALL RIGID MOUNT COUPLERS HAVE A 4-1/2" x 4-1/2" Bolt Pattern

20,000 Lb. Rigid Mount Coupler

- Auto-locking style coupler provides easy coupling attachment
- Bolts holes spacing 4½" x 4½"

Part #	Ball Size	Bolt Size	Max Capacity		Wt.
			G.T.W.	V.L.	
 200160	2 ⁵ / ₁₆ "	5/8"	20,000	2,000	12.75



20,000 lb. Rigid Mount Coupler Replacement Parts

Part #	Description
20016R	Replacement Latch

25,000 Lb. Rigid Mount Coupler

- Bolts holes spacing 4½" x 4½"


Part #	Ball Size	Bolt Size	Max Capacity		Wt.
			G.T.W.	V.L.	
 20007	2 ⁵ / ₁₆ "	5/8"	25,000	5,000	21



Channels

Gussets are available which provide the channel increased strength.

Part #	Model	Channel Length	Max Capacity	Wt.
			G.T.W.	
2373142B	3 Position	8½"	30,000	3
2376145B	5 Position	12½"	30,000	5
2376146	3 Position	8½"	20,000	3
2376148	5 Position	11½"	20,000	5
2376151	7 Position	16½"	20,000	7
2395165	Grade 8 Bolt Kit	-	-	4

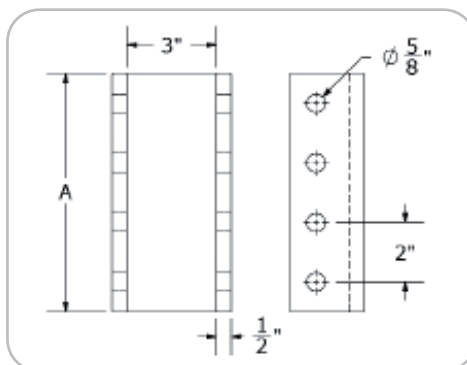

2376145B

Standard Dual Purpose Hitch


Dual Purpose Hitches accept 2" and 3" Wallace Forge Company eyes.



Part #	Model	Dimensions		Max Capacity			Wt.
		A	Ball Size	Hitch Ball	Pintle	Vertical Load	
 23061961	SDPH1780	1/2"	1 7/8"	6,000	8,000	3,000	13
 23071911	SDPH2000	1/2"	2"	16,000	16,000	3,000	13
 23081981	SDPH2516	1/2"	2 5/16"	16,000	16,000	3,000	14
23071922	SDPH2000 with Mounting Kit	2"	2"	16,000	16,000	3,000	14
23081992	SDPH2516 with Mounting Kit	2 5/16"	2 5/16"	16,000	16,000	3,000	15

SDPH Replacement Parts

Part #	Description
2099184	1 7/8" Ball
2100185	2" Ball
2101186	2 5/16" Ball
2325211	2" Ball
2325212	2 5/16" Ball
2308190	Replacement Latch
2382151	Snapper Pin, S-Hook, Chain for Latches

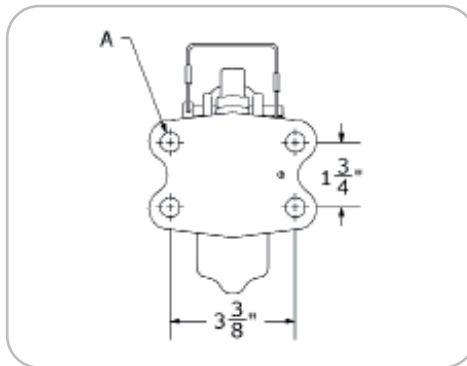

Heavy Duty Rigid Mount Magnum Hitch

- Black finish with chrome ball


These have the same mounting hole location as DPHs, mounting holes accept 9/16" bolts. Accept 2" and 3" Wallace Forge Company eyes.



Part #	Description	Dimensions		Max Capacity		Wt.
		A	Ball Size	G.T.W.	V.L.	
 2101188	2" Rigid Mount Magnum	9/16"	2"	20,000	4,000	18
 2101189	2 5/16" Rigid Mount Magnum	9/16"	2 5/16"	30,000	4,000	19

Rigid Mount Magnum Replacement Parts

Part #	Description
2101192	2" Ball
2101193	2 5/16" Ball
2098189	Latch
2382151	Snapper Pin, S-Hook, Chain for Latches

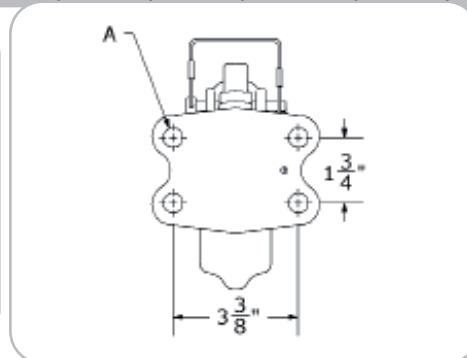

Dual Purpose Hitches are not to be welded or modified

Dual Purpose Hitch

- **Patented Dual Locking Assembly**
- Quality forging and precision assembly offers dependable service over the life of the hitch


All balls are interchangeable for easy replacement. Hitches are individually packaged for added convenience. Dual Purpose Hitches accept 2" and 3" Wallace Forge Company eyes.

**Patent Number
4,434,996**

Part #	Model	Dimensions		Max Capacity			Wt.
		A	Ball Size	Hitch Ball	Pintle	Vertical Load	
 2076118	DPH1780	1/2"	1 7/8"	6,000	8,000	3,000	13
 2077119	DPH2000	1/2"	2"	16,000	16,000	3,000	13
 2078120	DPH2516	1/2"	2 5/16"	16,000	16,000	3,000	14
 2331223	DPH50MM	1/2"	50mm	10,000	12,000	3,000	13
 2077120	DPH2000 with Mounting Kit		2"	16,000	16,000	3,000	14
 2078131	DPH2516 with Mounting Kit		2 5/16"	16,000	16,000	3,000	15




Pintle Hook In Use

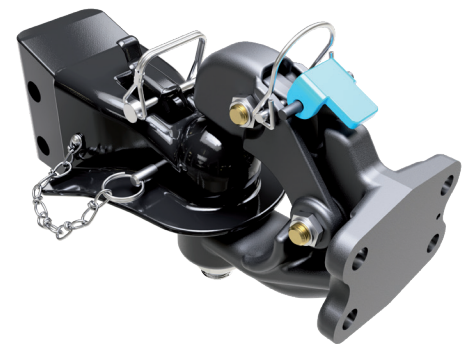

Ball Hitch In Use

SDPH Replacement Parts

Part #	Description
2099184	1 7/8" Ball
2100185	2" Ball
2101186	2 5/16" Ball
2325211	2" 16K Ball
2325212	2 5/16" 16K Ball
2094181	Replacement Latch
2382151	Snapper Pin, S-Hook, Chain for Latches

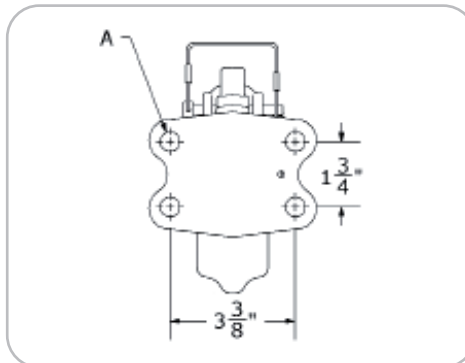

If 10,000 lbs. is stamped on head of the 2" ball use Part # 2100185, if 16,000 lbs. use Part # 2325211. If 10,000 is stamped on head of the 2 5/16" ball use Part # 2101186, if 16,000 lbs. use Part # 2325212.

Dual Purpose Hitches are not to be welded or modified

Dual Purpose Receiver

- Made for 2" receiver tubes
- Interchangeable balls
- Black finish with chrome ball

The DPR2000 and DPR2516 are the industry's ONLY dual purpose hitch with a 16,000 lb. tow ring capacity AND ball hitch capacity. Dual Purpose Receivers accept 2" and 3" Wallace Forge Company eyes.

	Part #	Model	RT Size	Ball Size	Max Capacity		Wt.
					Pintle	Vertical Load	
🇺🇸	2079121	DPR1780	2"	1 $\frac{7}{8}$ "	8,000	3,000	17
🇺🇸	2079121A	DPR2000	2"	2"	16,000	3,200	17
🇺🇸	2079121B	DPR2516	2"	2 $\frac{5}{16}$ "	16,000	3,200	18
🇺🇸	2080221A	2-1/2" DPR2000	2 $\frac{1}{2}$ "	2"	20,000	4,000	25
🇺🇸	2080221B	2-1/2" DPR2516	2 $\frac{1}{2}$ "	2 $\frac{5}{16}$ "	20,000	4,000	25

If 10,000 lbs. is stamped on head of the 2" ball use Part # 2100185, if 16,000 lbs. use Part # 2325211. If 10,000 is stamped on head of the 2 $\frac{5}{16}$ " ball use Part # 2101186, if 16,000 lbs. use Part # 2325212.

NEW PRODUCT INFORMATION

PART NUMBERS 2080221A & 2080221B are designed for use in a 2 $\frac{1}{2}$ " receiver tube.




2079121B



2080221B

DPR Replacement Parts

Part #	Description
2099184	1 $\frac{7}{8}$ " Ball
2100185	2" Ball
2101186	2 $\frac{5}{16}$ " Ball
2325211	2" 16K Ball
2325212	2 $\frac{5}{16}$ " 16K Ball
2094181	Replacement latch
2382151	Snapper Pin, S-Hook, Chain for Latches

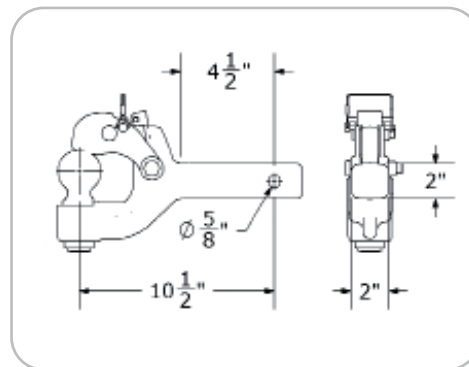

Heavy Duty Adjustable Magnum Hitch

- Black finish with chrome ball

These hitches are adjustable to fit to a trailer and accept 2" and 3"

Wallace Forge Company eyes. Channels are weldable.

	Part #	Description	Ball Size	Max Capacity		Wt.
				G.T.W.	V.L.	
	ADJ2003	2" Adj. Magnum and 3 Position Channel	2"	20,000	2,000	27
	ADJ2513	2 ⁵ / ₁₆ " Adj. Magnum and 3 Position Channel	2 ⁵ / ₁₆ "	30,000	3,000	28
	ADJ2005	2" Adj. Magnum and 5 Position Channel	2"	20,000	2,000	31
	ADJ2515	2 ⁵ / ₁₆ " Adj. Magnum and 5 Position Channel	2 ⁵ / ₁₆ "	30,000	3,000	32
	HDM2000	2" Adjustable Magnum - Hitch Only	2"	20,000	2,000	15
	HDM2516	2 ⁵ / ₁₆ " Adjustable Magnum - Hitch Only	2 ⁵ / ₁₆ "	30,000	3,000	16



Adjustable Magnum Replacement Parts

Part #	Description
2101192	2" Ball
2101193	2 ⁵ / ₁₆ " Ball
2098189	Latch
2382151	Snapper Pin, S-Hook, Chain for Latches

EZ Lock Gooseneck Couplers

- Easily locks onto a 2⁵/₁₆" ball hitch with minimal force
- Snapper Pin and Chain must be inserted when operating.

	Part #	Description	Ball Size	Max Capacity	Wt.
				G.T.W.	
	GC250000	25,000 lb Round Gooseneck Coupler Complete	2 ⁵ / ₁₆ "	25,000	56
	GC251614	30,000 lb Round Gooseneck Coupler Complete	2 ⁵ / ₁₆ "	30,000	58
	GC251628	30,000 lb Square Gooseneck Coupler Complete	2 ⁵ / ₁₆ "	30,000	58
	GC251600	30,000 Gooseneck Coupler Head Only	2 ⁵ / ₁₆ "	30,000	10



GC250000

GC251628



GC251600

Gooseneck Coupler Heads

Part #	Description	Max. Gross Trailer Weight	Wt.
1025166	For 2 ⁵ / ₁₆ " ball, lock pin included	30,000	7
HPL12312	½" x 3 ½" hitch pin only	-	1.5
1025165	For 3" ball, lock pin included	40,000	10
HPL34414	¾" x 4 ¼" hitch pin only	-	1.5



HPL34414

Gooseneck Hitch Plate with D-Rings


D-Rings for securing safety chains.
Additional bracing strongly recommended.

	Part #	Description	Plate Dimensions	Max GTW	Wt.
	2516BP-1RD	2 ⁵ / ₁₆ " ball with 1" rise and (2) 5/8" D-Rings	13" x 42" x 3/8"	30,000	68
	2516BPD	2 ⁵ / ₁₆ " ball with no rise and (2) 5/8" D-Rings	15" x 40" x 3/8"	30,000	65
	2516BP-16M	2 ⁵ / ₁₆ " ball with 1" rise and (2) 5/8" D-Rings	16" x 16" x 3/8"	30,000	



3" Gooseneck Coupler

	Part #	Description	Ball Size	Max Capacity	Wt.
				G.T.W.	
	GC300110	40,000 lb Square Gooseneck Coupler Complete	3"	40,000	52

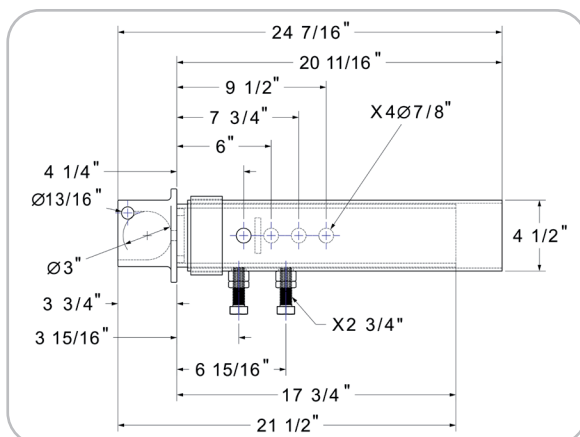

King Pin on a Pipe


This part is for Gooseneck Trailers only. Pipe has 1/4" thick walls. When drilling holes, do not drill through the seams of the pipe.

Part #	Description	Dimension		Max. G.T.W.	Wt.
		A	Hole Size		
 2085205	4" O.D. round pipe	22"	-	30,000	33
 2085207	4" O.D. round pipe	20"	0.875"	30,000	30
 2025163	4" O.D. square pipe	31"	1.125"	30,000	47
 2026164	4" O.D. square pipe	31"	0.840"	30,000	47
 2026165	4" O.D. square pipe	31"	1.250"	30,000	47




2085205

2085207

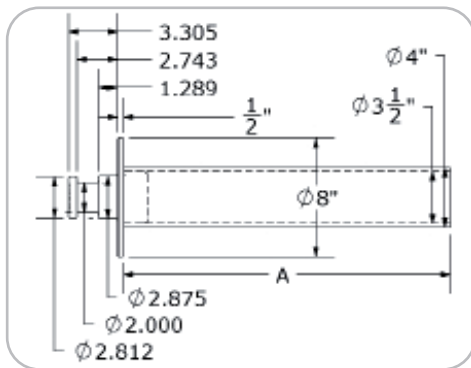

King Pin on a Round Pipe
2085205

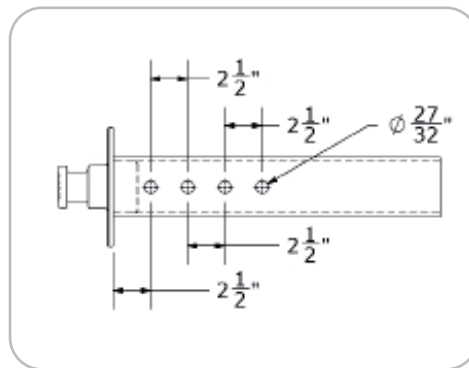

King Pin on a Square Pipe
2026164



2025163

Trailer Nose Plates


- Weldable

Plates allow for 3 different mounting positions. Predrilled nose plates must be reinforced to meet capacity.

Part #	Model	Description	Hole Size (A)	Plate Thickness (B)	Wt.
 TNP7165	3/4" Nose Plate	Use for R-48-A, R-49-A, R-50-A	5/8"	3/4"	24
 TNP16100	1" Nose Plate	Use for R-50-B, R-51-A	3/4"	1"	32



TNP7165

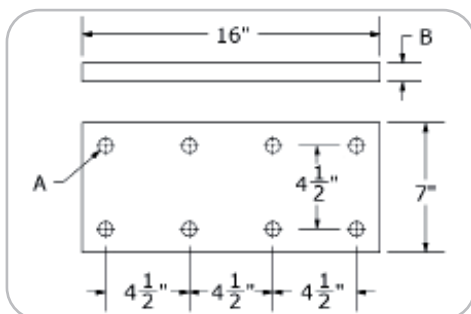


TNP16100

Tow Rings

	Part #	Model	Dimensions				Max Capacity		Wt.
			A	B	C	D	G.T.W.	V.L.	
	2065136	0-48-A	2½"	1"	2½"	⅝"	10,000	1,000	4
	2065130	0-49-A	2½"	1⅜"	2"	1"	10,000	2,000	7
	2065135	H-51-A	3"	1"	2½"	⅝"	10,000	1,000	4.5


Dimensions "C" and "D" should only be welded for mounting.

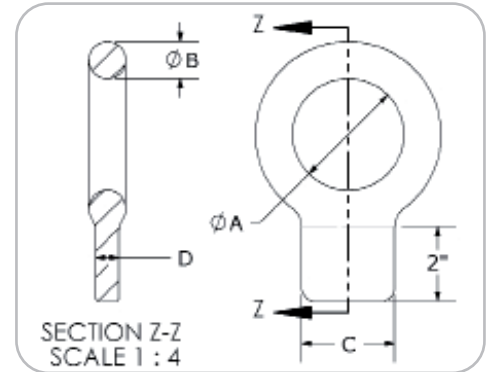

Bolt-On Drawbars

Do not weld or modify.

	Part #	Model	Dimensions						Standard Cap.		Hinged Tongue Cap.		Wt.
			A	B	C	D	E	F	G.T.W.	V.L.	G.T.W.	V.L.	
	2065137	0-43-D	2½"	17½"	3"	1¼"	1¼"	2"	20,000	4,000	100,000	500	20
	1111238	0-52-D	3"	17¼"	3"	1⅝"	1⅝"	2"	22,000	4,500	100,000	500	27
	1111245	0-42-D	2⅜"	17¼"	3"	3"	1⅝"	2"	40,000	8,000	100,000	500	40
	2068133	0-51-E	3"	15"	3"	2½"	1⅝"	1½"	35,000	7,000	100,000	500	30
	2070131	0-39-D	2¾"	15"	3"	1"	1¼"	1½"	20,000	4,000	100,000	500	16
	2071132	0-39-N	2¾"	15"	3"	1"	1¼"	N/D	20,000	4,000	100,000	500	16.5
	2062129	0-54-D	3"	17¼"	3"	3"	1⅝"	2"	40,000	8,000	100,000	500	42

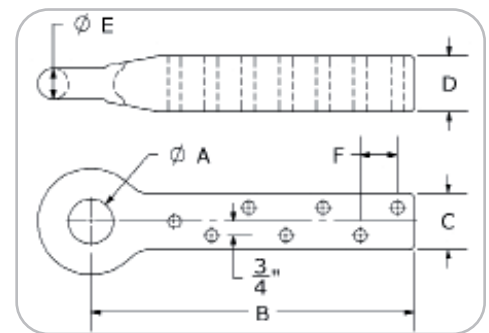

Bolt On Tow Rings

Tow Ring bases are 6"x 6" unless otherwise noted. R-50-A, R-50-B, R-51-A, R-51-B are one piece forging.

	Part #	Model	Dimensions			Max Capacity		Wt.
			A	B	C	G.T.W.	V.L.	
	2065138	R-48-A	2½"	1"	⅝"	10,000	1,000	11
	IQ09330	R-49-A	2½"	1½"	⅝"	42,000	6,000	15
	242000R-LEP	R-49-B	2½"	1⅜"	½"	32,000	5,000	15
	2066134	R-50-A	2½"	1⅜"	⅝"	48,000	7,000	15
	2066138	R-50-B	2½"	1⅜"	¾"	66,000	19,000	15
	2066131	R-50-L	2⅜"	1½"	¾"	100,000	15,000	25
	2067135	R-51-A	3"	1⅝"	¾"	66,000	19,000	21
	2067136	R-51-B	3"	1⅝"	⅞"	90,000	19,000	21
	2067134	R-51-C	3"	1⅝"	⅝"	50,000	10,000	21
	2068120	R-51-HD	3"	1⅝"	⅞"	100,000	20,000	22
	2067139*	Custom	3"	1½"	N/A	-	-	24

*Minimum hole size is ½", maximum capacity depends on hole size.



2067135




2066131



IQ09330

Tow Ring Mounting Kits


Part #	Description
BK580	⅝" Bolt Kit for R-48-A, R-49-A, R-50-A
BK340	¾" Bolt kit for R-50-B, R-51-A

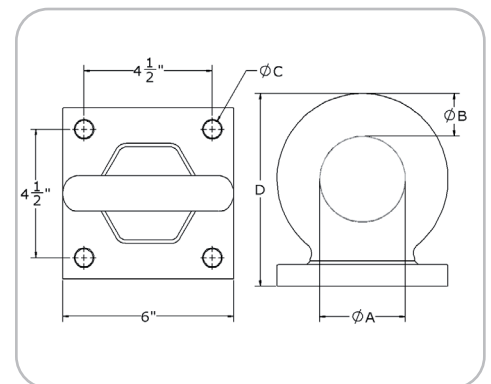

Warning: Do not use pintle hooks that restrict the movement or rotation of the pintle ring. This includes, but is not excluded to, "fish mouth" style tow hooks designed strictly for on the road towing.

Swivel Tow Rings

	Part #	Model	Dimensions				Max Capacity		Wt.
			A	B	C	D	G.T.W.	V.L.	
	2061127	0-50-A	2½"	1½"	3½"	1½"	20,000	3,000	10
	2062128	0-51-B	3"	1⅝"	4"	2"	50,000	6,500	16.5
	2063126	51337	3"	1⅝"	8¼"	2"	50,000	9,000	24
	2010455	51337 in Mounting Block	3"	1⅝"	8¼"	2"	50,000	9,000	40

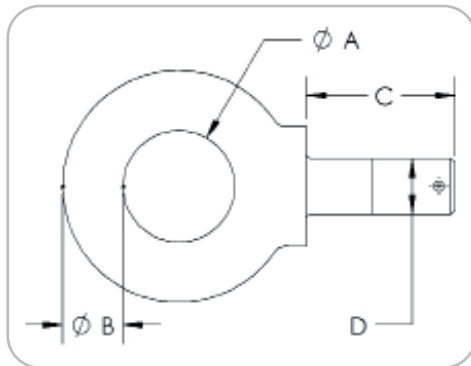

2061127



2063126



2010455

Dolly Hinge Assembly

Designed to be using with round tubing on converter dollies.


Part #	Description	Wt.
PTH-100	Hinged Dolly Frame Bracket	12
PTH-200	Hinged Dolly Pipe Mount	9
PTH-300	Hinged Dolly Bracket Clamps	1
PTH-400	Hinged Dolly Frame Rubber Bushings	2
PTH-600	Round Pipe Mount Hinge Kit - (2) Brackets, (2) Mounts, (4) Clamps, (4) Bushings	48



Weld On Tow Rings

Designed to be using with round or square tubing on converter dollies.

Part #	Description	Max Capacity		Wt.
		G.T.W.	V.L.	
2067210	WF 300S Square Tubing or Channel	100,000	15,000	15
2067230	WF 250R Round Tubing	100,000	15,000	15

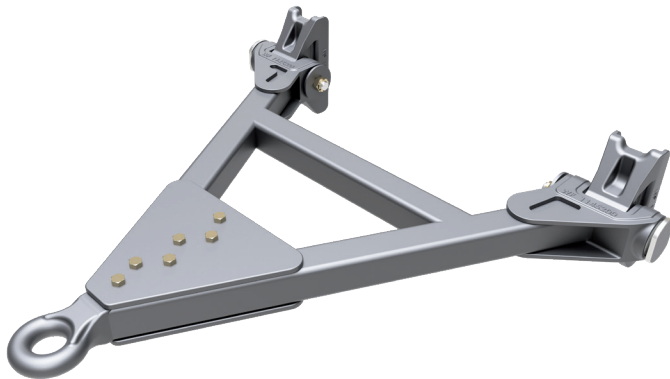

2067210




2067230

Swivel Drawbar Assembly

Swivel Drawbar assembly is designed to be used in conjunction with 1064121S pr 2064121S Swivel Drawbars

Part #	Description	Wt.
2064121SPOA	Steel Mounting Bracket and Polyethylene Bushings	17



Drawbar Hinge Assembly

	Part #	Description	Wt.
	1145100	Trailer Frame Bracket	26
	1145200	Hinged Tongue Bracket	20
	1145300	Bolt Assembly (Bolt, 2 Rubber Bushings, Washer, and Lock Nut)	12
	1145400	Single Assembly (1145100, 1145200, 1145300)	58
	1145500	Complete Assembly (2 - 1145100, 2- 1145200, 2 1145300)	116



Warning: This equipment should not be used or maintained in a haphazard manner. Inspect for proper installation. Inspect before use for wear and deformation requiring replacement. Replace worn parts with Wallace Forge Company replacement parts. Clean and lubricate properly. Use proper bolts for mounting with proper torque.

Wallace Forge recommends replacing all tow rings if there is 1/8" or more of wear to the tow ring.

2³/₈" Swivel Drawbar

- **Solid one piece forging** complete with locknut and Snap Ring
- Drawbar Eye has 2³/₈" wide I.D.
- Hinged Tongue Capacity:
- 100,000 lb. Gross Trailer Weight - 2,500 Tongue Weight

Part #	Dimensions					Wt.
	A	B	C	D	Shaft	
 2064121S	8 ¹ / ₈ "	3 ¹ / ₄ "	11 ³ / ₈ "	13 ¹ / ₈ "	2"	24
 2064124K	8 ¹ / ₈ "	3 ¹ / ₄ "	11 ⁵ / ₈ "	14 ³ / ₈ "	2 ¹ / ₄ "	28

2³/₈" Swivel Drawbar


3" Swivel Drawbar

- **Solid one piece forging** complete with locknut and snap ring
- Hinged Tongue Capacity:
- 150,000 lb. Gross Trailer Weight - 2,500 Tongue Weight

Part #	Dimensions					Wt.
	A	B	C	D	Shaft	
 1064120L	9 ¹ / ₄ "	3 ¹ / ₄ "	12 ¹ / ₂ "	15 ¹ / ₄ "	2"	25
 1064121S	8 ¹ / ₈ "	3 ¹ / ₄ "	11 ³ / ₈ "	13 ¹ / ₈ "	2"	24
 1064122SE	10 ¹ / ₈ "	3 ¹ / ₄ "	13 ³ / ₈ "	15 ¹ / ₈ "	2"	26
 1064123SM	6 ¹ / ₄ "	3 ¹ / ₄ "	9 ¹ / ₂ "	12 ⁷ / ₈ "	2"	22
 1064124K	8 ¹ / ₈ "	3 ¹ / ₄ "	11 ⁵ / ₈ "	14 ³ / ₈ "	2 ¹ / ₄ "	28
 1064125KSE	10 ¹ / ₈ "	3 ¹ / ₄ "	13 ⁵ / ₈ "	16 ³ / ₈ "	2 ¹ / ₄ "	30
 1064126KL	9 ¹ / ₄ "	3 ¹ / ₄ "	12 ³ / ₄ "	15 ¹ / ₄ "	2 ¹ / ₂ "	29



3" Swivel Drawbar

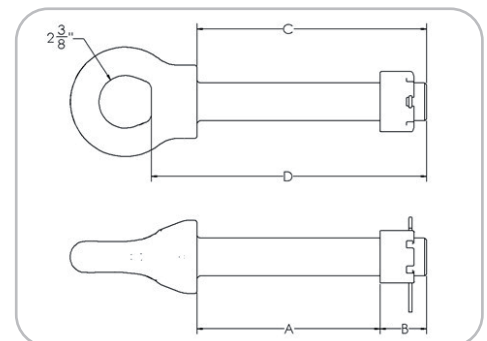


Warning: This equipment should not be used or maintained in a haphazard manner. Inspect for proper installation. Inspect before use for wear and deformation requiring replacement. Replace worn parts with Wallace Forge Company replacement parts. Clean and lubricate properly. Use proper bolts for mounting with proper torque. Wallace Forge recommends replacing all tow rings if there is 1/8" or more of wear to the tow ring.

6508 Tow Ring

- Weldable


Part #	Max Capacity		Wt.
	G.T.W	V.L	
 2065125	15,000	5,000	11

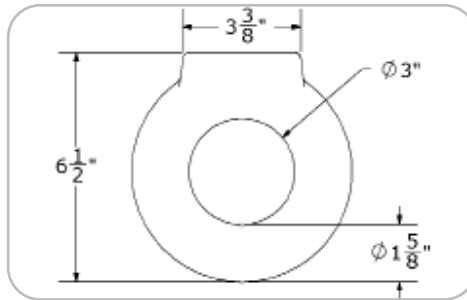

Fish Tail Tow Rings

Part #	Model	Dimensions					Max Capacity		Wt.
		A	B	C	D	E	G.T.W.	V.L.	
 2069124	0-51 FT	3"	10"	4"	3 3/8"	1 5/8"	20,000	4,000	13.25
 2069120	0-51 LT	3"	12"	6"	3 7/8"	1 5/8"	20,000	4,000	16.5


Dimensions "C" and "D" should only be welded for mounting.

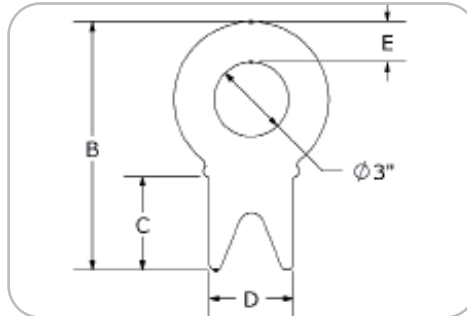

LM/SM and Dynaweld® Rings

These rings are not weldable. All these parts include one bolt, washers. LM and SM tow ring come with small mounting plate.

Part #	Model	Dimensions					Max Cap.		Wt
		A	B	C	D	E	G.T.W.	V.L.	
 DM00122		1 1/2"	1 1/2"	2 1/2"	1 1/2"	4 1/2"	30,000	6,000	34
 DM01123		2"	2"	3"	1 1/2"	4 1/2"	60,000		42
 DM01124		1 1/2"	1 1/2"	3"	1 1/2"	4 1/2"	30,000	6,000	34
2300122	R51SM	1 5/8"	1 3/4"	3"	1 5/8"	3 1/2"	30,000	6,000	36
2301123	R51LM	1 5/8"	2"	3"	1 5/8"	4 1/2"	60,000		44

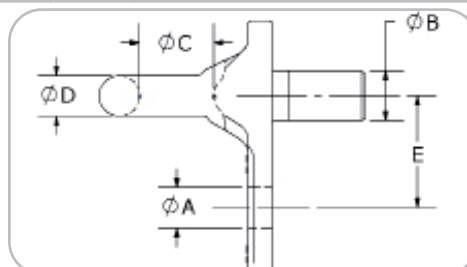

LM/SM Mounting Plates

Part #	Model	Description	Wt.
 2304205	R-51-SM Plate	15 5/8" height, 5 7/8" width, 1" thick, 3 1/2" center to center hole spacing	26
 2305206	R-51-LM Plate	15 5/8" height, 5 7/8" width, 1" thick, 4 1/2" center to center hole spacing	26

Adjustable Forged Eye Assemblies

Assemblies include adjustable forged eye, formed steel channel and grade 8 mounting kit. Do not weld forged rings, only channel. Please note Low Vertical Capacity.




Do not overly torque or tighten nuts to try and take the play out. Bolt Failure will occur if nuts and bolts are over-torqued.

Part #	Model	Dimensions			Max Capacity		Wt.
		A	B	C	G.T.W.	V.L.	
2373142	3 Position Channel with 048 Ring	2½"	1"	8½"	20,000	1,000	19
2375144	5 Position Channel with 048 Ring	2½"	1"	12½"	20,000	1,000	23
 2374143	3 Position Channel with 049 Ring	2½"	1⅜"	8½"	30,000	2,000	22
 2376145	5 Position Channel with 049 Ring	2½"	1⅜"	12½"	30,000	2,000	26
2377303	3 Position Channel with 909330 Ring	3"	1⅝"	8½"	25,000	3,000	22
2377305	5 Position Channel with 909330 Ring	3"	1⅝"	12½"	25,000	3,000	26
 2373142E	0-48 Ring Only, No Channel	2½"	1"	N/A	20,000	1,000	8
 2374143E	0-49 Ring Only, No Channel	2½"	1⅞"	N/A	30,000	2,000	10
909330	3" Eye Diameter, No Channel	3"	1⅝"	N/A	25,000	3,000	11.25


Adjustable Forged Eye Mounting Kits

Part #	Description
2395165	Mounting Kit

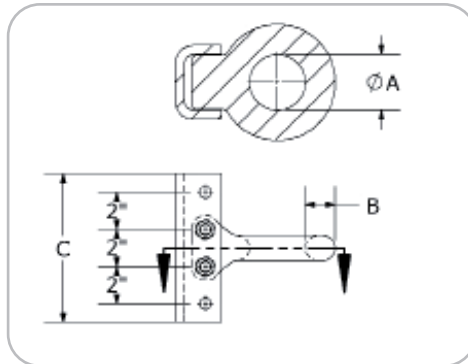


Adjustable Clevis

Part #	Max G.T.W.	Wt.
305815	16,000	7
1040724	20,000	12

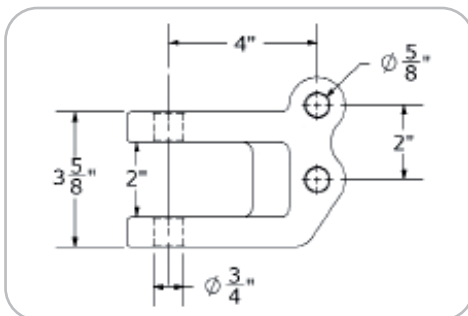

305815

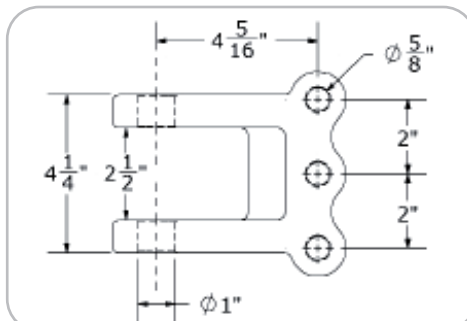

1040724



305815



1040724

Master Link

- Weldable

Part #	Model	Dimensions		Wt.
		Hole Diameter	Ring Thickness	
 2021143	0-49-B	3"	1 5/8"	9



Aluminum Mounting Blocks

- Weldable

Part #	Bushing	Thickness	Hole Size	Wt.
1143700	No	1 1/4"	1 1/4"	1.5
1143800	No	1 1/4"	1"	1.25
1143700B	Yes	1 1/4"	1 1/4"	1.75



Tarp Hook

Part #	Description	Height	Width	Depth	Opening	Wt.
1144100*	Aluminum	2 3/4"	7/8"	1 5/8"	1"	0.15
2344236	Steel					10

* 1144100 is weldable.



1144100



2344236

3/8" Chain Grab Hooks

Part #	Description	Wt.
2386155	Grab Hook	0.5




2386155

Narrow & Wide Hinge Assemblies

- Weldable
- Forged

Part #	Post	Dimensions			Wt.
		A	B	C	
223103	1 1/4"	2 1/2"	2 7/16"	4 1/64"	7.8
223104	1 1/4"	4"	2 1/2"	4 1/64"	8
 250141	1 1/4"	2 1/2"	2 1/2"	1/2"	9
 270150*	1 1/4"	2 1/4"	2 1/2"	1/2"	9.75

*270150 comes drilled with 4 holes that fit 1/2" bolts and is designed for application on aluminum dump bodies.

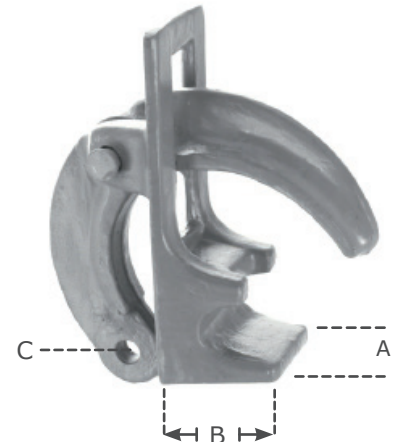

Door Hinge

- Holes sized for $\frac{3}{8}$ " Bolts

Part #	Description	Wt.
2024172	Forged hinge with pin, no strap	1.5
2024171	Forged strap only	1.25
2024170	Complete forged door hinge	2.75



Aluminum Hinge with Washer

- Weldable

Part #	Wt.
1143600	9.5




Hand Grip

Do not weld or modify. All hand grips have the same mounting hole center-line and are held in place by a flat stainless steel spring.

Part #	Description	Coating	Wt.
9572518	Small Hand Grip	Black Powder	2.5

Weldable Steps

Part #	Model	Wt.
1143500	Aluminum Step	1.5
1144200	Cast Steel Step	2.5



Banjo Eyes

- Weldable

Part #	Material	Thickness	Round	Shank	Wt
223100	Steel	$\frac{5}{16}$ "	$1\frac{5}{16}$ "	$\frac{1}{2}$ "	1
1147700	Aluminum	2"	$1\frac{1}{2}$ "	$\frac{5}{8}$ "	3




Aluminum




Steel

Steel Tailgate Latch Assembly


Assembly with Gusset			
Item	Part #	Description	Wt.
A	TL HAND AS	Handle Assembly	2
B	TL WASHER	3/4" I.D. Washer	0.5
C	TL ROD E1	Forged Rod End - 3/4" NC	1
D	TL PLT	Weldable Clevis Plate	1
E	TL PINST	Pin Assembly (E= 2½")	0.5
F	TL BAS	Weldable Base Plate	5
G	TL AS6	Complete Handle Assembly Includes (A, B, C, E)	4
H	WGA703	Complete Steel Assembly with Gusset's	10

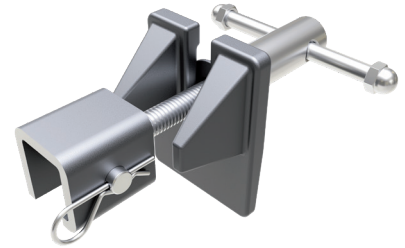


Assembly with Gussets

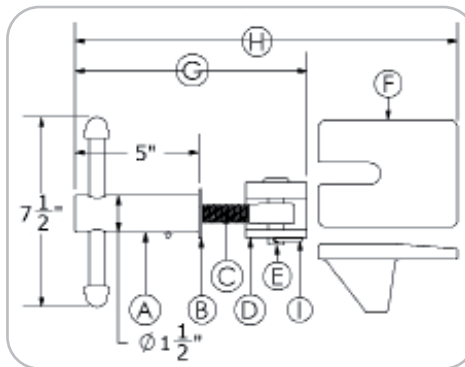

Assembly without Gusset			
Item	Part #	Description	Wt.
A	TL HAND AS	Handle Assembly	2
B	TL WASHER	3/4" I.D. Washer	.5
C	TL ROD E1	Forged Rod End - 3/4" NC	1
D	TL PLT	Weldable Clevis Plate	1
E	TL PINST	Pin Assembly (E= 2½")	0.5
F	TL BAS PL	Weldable Base Plate	4
G	TL AS6	Complete Handle Assembly Includes (A, B, C, E)	4
H	TLGA703	Complete Steel Assembly without Gusset's	9

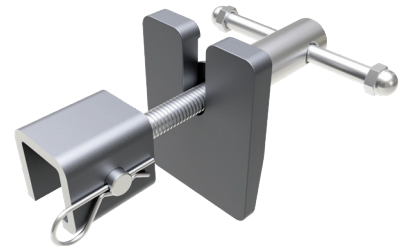


Assembly without Gussets

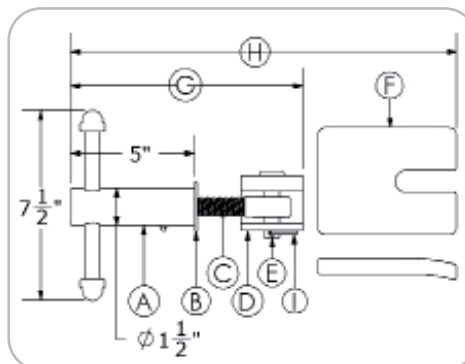


Aluminum Tailgate Latch Assembly


Assembly with Gusset			
Item	Part #	Description	Wt.
A	TL HAND AS	Handle Assembly	2
B	TL WASHER	¾" I.D. Washer	0.5
C	TL ROD E1	Forged Rod End - ¾" NC	1
D	31581	Weldable Clevis Plate	1
E	TL PINAL	Pin Assembly (E= 3")	0.25
F	31582	Weldable Base Plate	2
G	TL AL100	Complete Handle Assembly Includes (A, B, C, E)	3.75
H	ALUGA703	Complete Aluminum Assembly with Gusset's	6.75

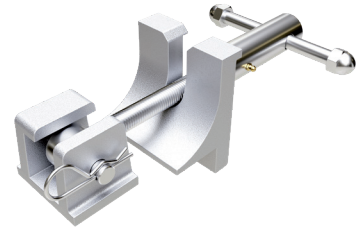


Assembly with Gussets

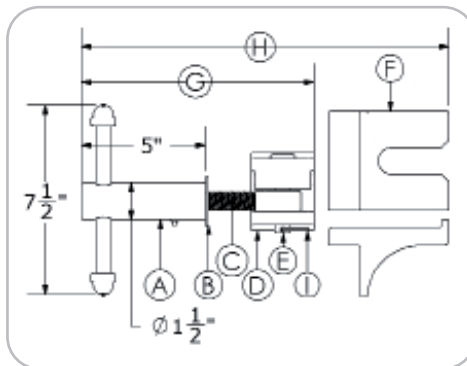

Assembly without Gusset			
Item	Part #	Description	Wt.
A	TL HAND AS	Handle Assembly	2
B	TL WASHER	¾" I.D. Washer	0.5
C	TL ROD E1	Forged Rod End - ¾" NC	1
D	31581	Weldable Clevis Plate	1
E	TL PINAL	Pin Assembly (E= 3")	0.25
F	1413900	Weldable Base Plate	1
G	TL AL100	Complete Handle Assembly Includes (A, B, C, E)	3.75
H	ALWOG2008	Complete Aluminum Assembly without Gusset's	5.75



Assembly without Gussets

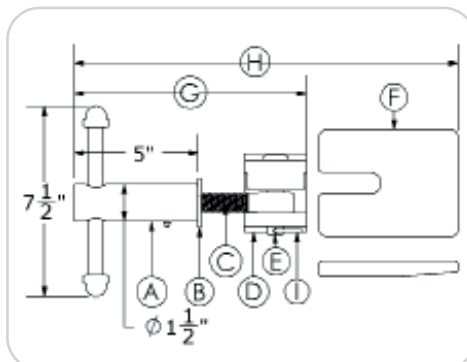


Triple Ball Hitch

- Forged Locking Mechanism
- Dual Locking Latch

Please note hitch and coupling device should not be coupled during loading and off-loading stages.




Part #	Ball Sizes	Max Capacity G.T.W.		Finish	Wt.
		w/ Ball	w/ Pintle Hook		
BPH262150	1 7/8"	6,000	-	Black Balls	24
	2"	10,000	-		
	2 5/16"	10,000	10,000		
CPH262100	1 7/8"	6,000	-	Chrome Balls	24
	2"	10,000	-		
	2 5/16"	10,000	10,000		

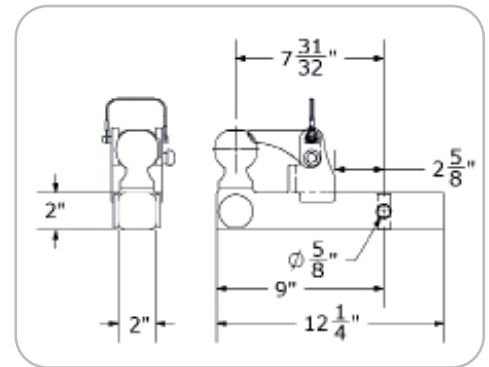


Double Ball Mounts

Part #	Ball Sizes	Ball Max Capacity G.T.W.	Finish	Wt.
2621618	1 7/8"	6,000	Black Balls	17
	2"	10,000		
2621618C	1 7/8"	6,000	Chrome Balls	17
	2"	10,000		
261217	2"	10,000	Black Balls	17
	2 5/16"	10,000		
261217C	2"	10,000	Chrome Balls	17
	2 5/16"	10,000		

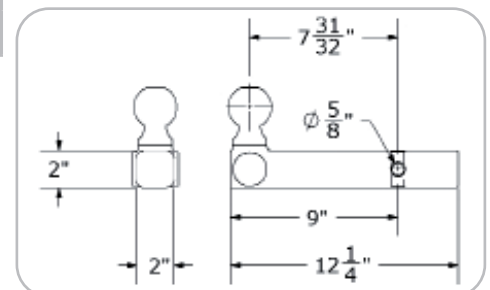

Triple Ball Mounts


Part #	Ball Sizes	Ball Max Capacity G.T.W.	Finish	Wt.
 2621620	1 $\frac{7}{8}$ "	6,000	Black Balls	19
	2"	10,000		
	2 $\frac{5}{16}$ "	10,000		
 2621620C	1 $\frac{7}{8}$ "	6,000	Chrome Balls	19
	2"	10,000		
	2 $\frac{5}{16}$ "	10,000		

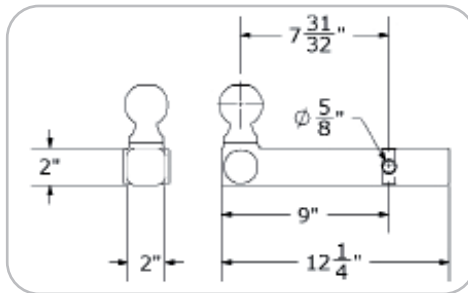

Adjustable High Low Bar

Complete with 2" Ball and 2-5/16" Ball and adjustable to 5 positions.

Part #		Finish	Max Capacity		Wt
			G.T.W.	V.L.	
1803089	2"	Black Balls	10,000	1,000	
1803090	2-1/2"	Black Balls	20,000	2,000	



Solid Forged High Low Bars

High Low Bars accept $\frac{5}{8}$ " hitch pin, and are designed for a 2" receiver tube only. Standard hole size is 1".

	Part #	Model	Hole to Hole	Appx. Drop	Finish	Max Capacity		Wt.
						G.T.W.	V.L.	
	2309199	HL62	8"	2"	Black	20,000	2,000	12
	2310200	HL102	10"	2"	Black	20,000	2,000	13.5
	2311201	HL64	8"	4"	Black	20,000	2,000	12.5
	2312202	HL104	10"	4"	Black	20,000	2,000	14.25
	2313203	HL66	10"	6"	Black	17,000	1,700	14
	2314204	HL106	12"	6"	Black	17,000	1,700	18

If you require an $1\frac{1}{4}$ " hole please put -125 after the Part #.

(Ex. 2309199-125 would be a HL-62 with $1\frac{1}{4}$ " hole)

If you require a $\frac{3}{4}$ " hole please put -75 after the Part #.

(Ex. 2309199-75 would be a HL-62 with $\frac{3}{4}$ " hole)




2309199

Smooth Shank Ball

This ball is for use on gooseneck channels with a $2\frac{3}{16}$ " smooth shank hole.


Part #	Finish	Wt.
2325223	Machine	8.5

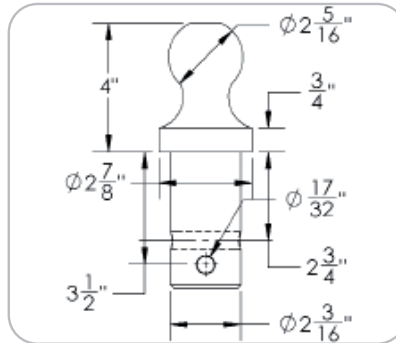

2" Receiver on an 8 Hole Plate

- Takes a $\frac{5}{8}$ " hitch pin
- Accepts $\frac{1}{2}$ " Bolts

Part #	Max Cap. G.T.W.	Wt.
 2201172	10,000	11

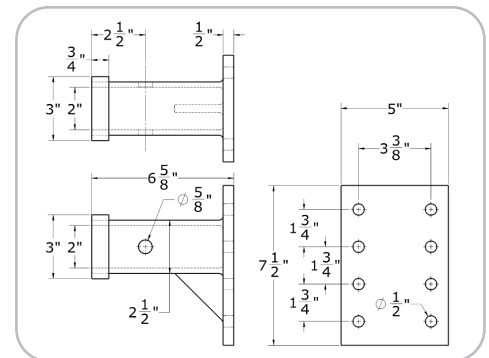

2 1/2" to 2" Receiver Tube Reducer

- Takes a $\frac{5}{8}$ " hitch pin
- Durable Black Powder Coat Finish


Part #	Wt.
6NA9128	3



Hitch Balls

Do not weld hitch balls.

Part #	Model	Dimensions				Finish	Max Capacity G.T.W.	Wt.
		(A)	B	C	D			
2324216	CBH1A	1 $\frac{7}{8}$ "	$\frac{3}{4}$ "	1 $\frac{3}{4}$ "	2 $\frac{5}{8}$ "	Chrome	2,000	1.5
2357126	CBH2A	2"	$\frac{3}{4}$ "	2 $\frac{5}{16}$ "	2 $\frac{3}{4}$ "	Chrome	3,500	1.75
2325217	CBH3A	2"	1"	2"	2 $\frac{11}{16}$ "	Chrome	6,000	2
2326218	CBH4A	2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	2 $\frac{1}{8}$ "	3 $\frac{1}{8}$ "	Chrome	7,500	4.5
2356248	CBH5A	2 $\frac{5}{16}$ "	1"	2"	2 $\frac{5}{8}$ "	Chrome	6,000	3
2358127	CBH8A	2"	1"	2 $\frac{1}{4}$ "	2 $\frac{5}{8}$ "	Chrome	10,000	2.5
2325200	CBH9A	2 $\frac{5}{16}$ "	1"	2 $\frac{1}{4}$ "	2 $\frac{5}{8}$ "	Chrome	10,000	3
2114122		2"	1 $\frac{1}{4}$ "	2 $\frac{3}{4}$ "	2 $\frac{3}{4}$ "	Chrome	13,000	2.5
2516114		2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	2 $\frac{7}{8}$ "	3 $\frac{1}{4}$ "	Chrome	16,000	5
2395210		2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	3 $\frac{1}{2}$ "	3 $\frac{1}{4}$ "	Zinc	10,000	5
2395240		2 $\frac{5}{16}$ "	1 $\frac{1}{2}$ "	3 $\frac{1}{2}$ "	3 $\frac{3}{8}$ "	Zinc	10,000	5
2395250		2 $\frac{5}{16}$ "	2"	3 $\frac{1}{2}$ "	3 $\frac{3}{8}$ "	Machine	10,000	9
WF94009		2 $\frac{5}{16}$ "	2"	3 $\frac{1}{2}$ "	3 $\frac{3}{8}$ "	Machine	30,000	9
2325201	CBH10A	2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	3"	3 $\frac{7}{16}$ "	Machine	30,000	5
2325222	CB3A	2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	2 $\frac{5}{8}$ "	3 $\frac{3}{8}$ "	Machine	30,000	5
2083163	BH5A	3"	2"	3 $\frac{1}{4}$ "	4 $\frac{1}{2}$ "	Machine	40,000	11.5
WF80200		2"	1"	2"	2 $\frac{3}{4}$ "	Machine	5,000	4
WF81371		2 $\frac{5}{16}$ "	1 $\frac{3}{8}$ "	2 $\frac{1}{2}$ "	3 $\frac{3}{8}$ "	Machine	40,000	5
WF80211		2 $\frac{5}{16}$ "	1 $\frac{3}{8}$ "	2 $\frac{1}{2}$ "	3 $\frac{3}{8}$ "	Machine	13,000	5

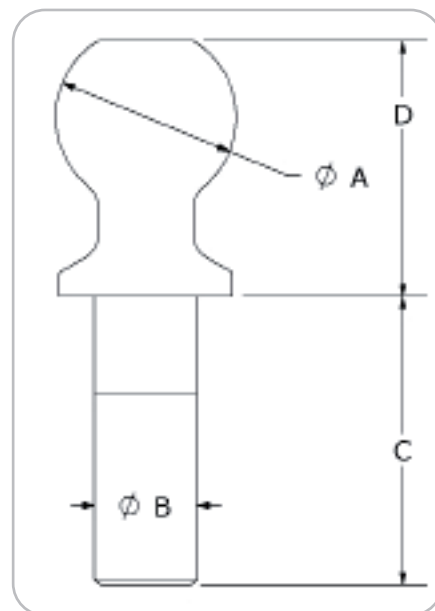


High Rise & Hex Collar Hitch Balls

Do not weld hitch balls.

Part #	Dimensions					Finish	Max Capacity G.T.W.	Wt.
	(A)	B	C	D	E			
2395100	2"	1"	2"	4"	1"	Zinc	5,000	6
2395110	2"	1"	2"	4 $\frac{1}{2}$ "	2"	Zinc	3,000	3.5
2395230	2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	2 $\frac{1}{2}$ "	3 $\frac{3}{4}$ "	1"	Zinc	7,000	6
2395200	2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	3 $\frac{1}{4}$ "	4 $\frac{1}{16}$ "	1"	Zinc	7,000	5
2395220	2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	2 $\frac{1}{2}$ "	5"	2"	Zinc	5,000	5
2325221	2 $\frac{5}{16}$ "	1 $\frac{3}{8}$ "	3 $\frac{1}{4}$ "	4 $\frac{3}{16}$ "	1"	Zinc	30,000	6
2325220	2 $\frac{5}{16}$ "	1 $\frac{1}{2}$ "	3"	5 $\frac{1}{4}$ "	2"	Zinc	30,000	8.25

Hex Collar Hitch Balls								
251640SQ	2 $\frac{5}{16}$ "	1 $\frac{3}{8}$ "	3 $\frac{1}{4}$ "	3 $\frac{3}{8}$ "	0"	Machine	40,000	6
212516SQ	2 $\frac{5}{16}$ "	1 $\frac{1}{4}$ "	3 $\frac{1}{4}$ "	4 $\frac{1}{4}$ "	1"	Machine	30,000	8.25
212380SQ	2 $\frac{5}{16}$ "	1 $\frac{3}{8}$ "	3 $\frac{1}{4}$ "	4 $\frac{1}{4}$ "	1"	Machine	30,000	6

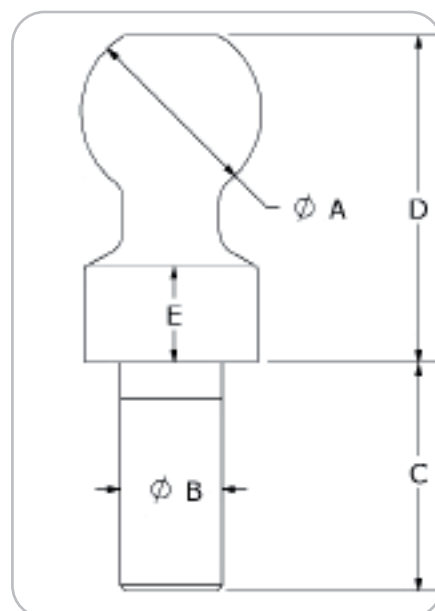

Cast Collar Receiver Tubes

- Heavy duty cast collar
- Accepts 2" square hitch bar
- Receiver tubes are drilled for a $\frac{5}{8}$ " hitch pin


	Part #	Model	Tube Length	Max Capacity G.T.W.	Wt.
	2359128	RT6	6"	10,000	4
	2360129	RT8	8"	10,000	5
	2361130	RT10	10"	10,000	7
	2361131	RT12	12"	10,000	8
	2361132	RT18	18"	10,000	10
	2361133	RT24	24"	10,000	16
	2361134	RT36	36"	10,000	24
	2361135	RT48	48"	10,000	32



Receiver Tube Extenders

A hitch's max capacity is reduced by 33% when a hitch extender is used.

	Part #	Model	Dimensions		Wt.
			A	B	
	2200007	7" Hitch Extender	12 $\frac{3}{4}$ "	7"	13
	2200014	14" Hitch Extender	19 $\frac{3}{4}$ "	14"	22
	2200018	18" Hitch Extender	22 $\frac{3}{4}$ "	18"	24

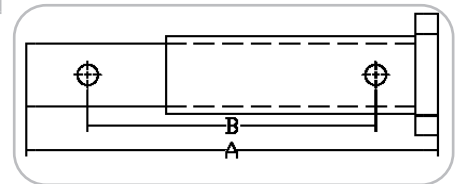

Bent Hitch Pin Assembly

- White zinc plated to resist corrosion




Part #	Model	Wt.
2319210	$\frac{1}{2}$ " Hitch Pin and Spring Clip	1
2319211	$\frac{5}{8}$ " Hitch Pin and Spring Clip	1
2319212	$\frac{5}{8}$ " Hitch Pin and Spring Clip for 2 $\frac{1}{2}$ " Receiver Tube	1
2160000	$\frac{3}{16}$ " X 3" Spring Clip Only	.25
2110000	$\frac{3}{32}$ " X 1 $\frac{5}{8}$ " Spring Clip Only	.25



Pintle Hook Adapters

- Designed for 2" Receiver tubes

	Part #	Model	# of Holes	Dimensions			Max Cap. G.T.W.	Wt.
				A	B	C		
	2202172	RE6504	4	9"	4"	7"	16,000	
	2203173	RE8504	4	12 1/8"	4"	9"	16,000	
	2200170	RE6500	8	9"	7 1/2"	7"	16,000	
	2201171	RE8500	8	12 1/8"	7 1/2"	9"	16,000	
	2354246	RE6511	12	9"	11"	7"	16,000	
	2355247	RE8511	12	12 1/8"	11"	9"	16,000	
	2352244	RE6512	14	9"	12 1/2"	7"	16,000	
	2353245	RE8512	14	12 1/8"	12 1/2"	9"	16,000	

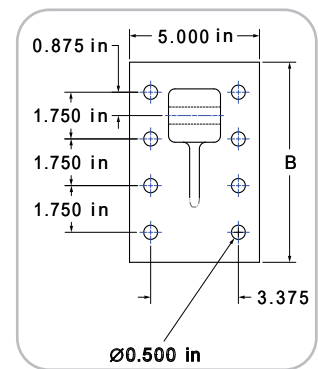


2 1/2" & 3" Pintle Hook Adapters


- Designed for 2 1/2" & 3" Receiver tubes
- Set screw added for tightening against receiver tube to reduce rattle



	Part #	Model	# of Holes	Dimensions			Max Cap. G.T.W.	Wt.
				A	B	C		
	2353246	RE2500	8	12"	7 1/2"	7 3/8"	24,000	
	2352120	REC2570	8	"	"	"	24,000	
	2353200	REC3000	8	"	"	"	25,000	

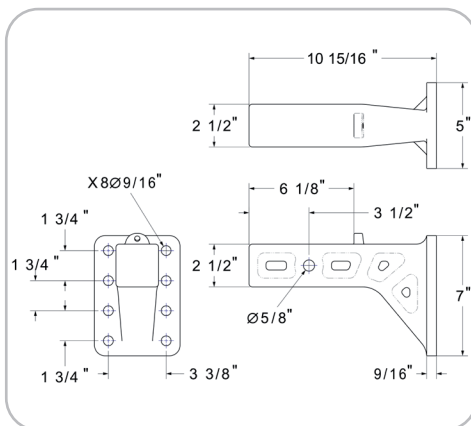

2352120

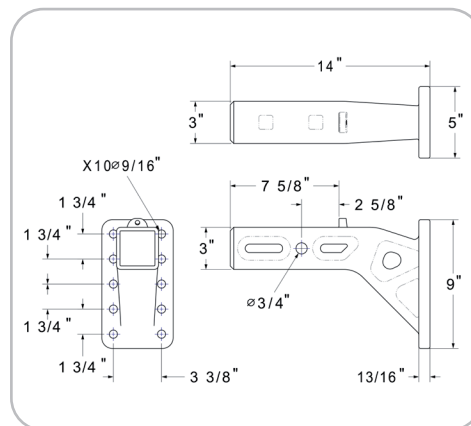

2353200



Chassis Container Locks



Part #	Model	Finish	Wt.
CTW100R	Manual Container Chassis Lock Right	Black	5
CTW100L	Manual Container Chassis Lock Left	Black	5
CTW200R	Manual Container Chassis Lock Right	Black	10
CTW200L	Manual Container Chassis Lock Left	Black	10



CTW200



CTW100

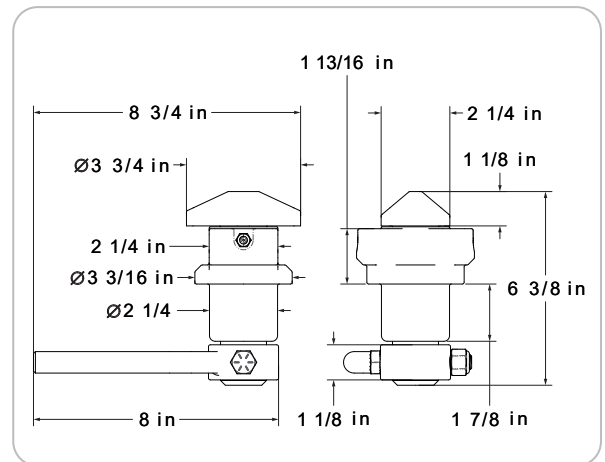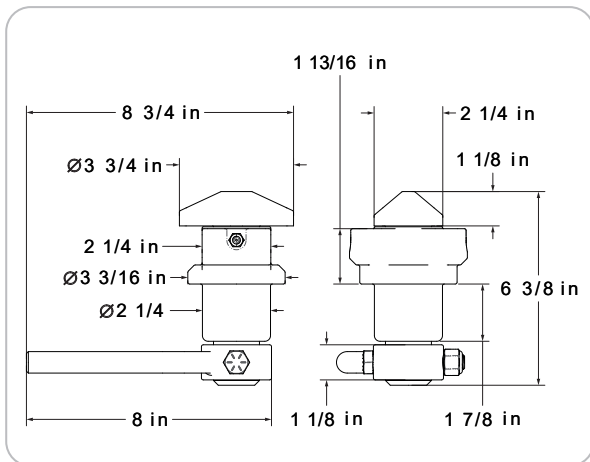


3 Hole Tow Hook

- Black Finish


Part #	Description	Dimensions			Max Cap. G.T.W.	Wt.
		A	B	C		
2072137R	0-74 Right	2 1/2"	2 3/4"	4 1/2"	44,000	5
2072137L	0-74 Left	2 1/2"	2 3/4"	4 1/2"	44,000	5
2075140	0-76-A Straight	2 3/8"	2 3/16"	2 1/2"	20,000	4



0-74 Left

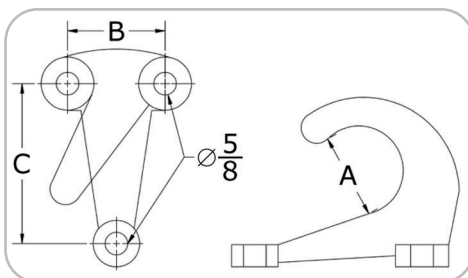

0-74 Left

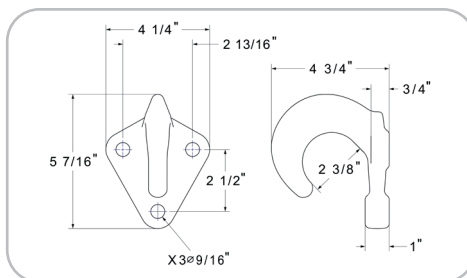

0-74 Left




0-74 Left

0-81 Tow Hook

- Black Finish
- Forged



Part #	Model	Max Cap. G.T.W.	Wt.
 2315207	0-81	30,000	8

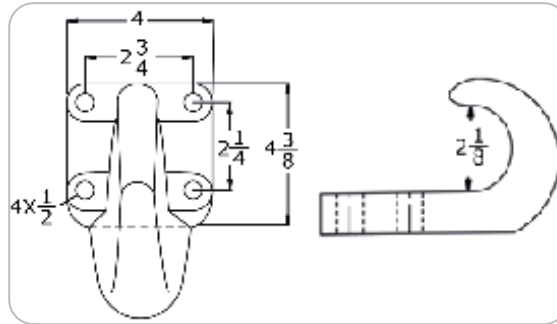

0-58 Tow Hook

- Black Finish
- Forged

Part #	Model	Finish	Max Cap. G.T.W.	Wt.
2316208	0-58	Chrome	10,000	1.75
2316208B	0-58	Black	10,000	1.75




Forged Tow Hook

- Black Finish

Part #	Model	Dimensions					Max Cap. G.T.W.	Wt.
		A	B	C	D	E		
 2316209R	0-53 Right	3"	4 ³ / ₁₆ "	1 ¹ / ₂ "	2 ¹ / ₃₂ "	2 ⁵ / ₃₂ "	44,000	8
 2316209L	0-53 Left	3"	4 ³ / ₁₆ "	1 ¹ / ₂ "	2 ¹ / ₃₂ "	2 ⁵ / ₃₂ "	44,000	8
2074139R	0-55 Right	2 ¹ / ₂ "	4 ³ / ₁₆ "	1 ¹ / ₂ "	2 ¹ / ₃₂ "	2 ⁵ / ₃₂ "	15,000	5
2074139L	0-55 Left	2 ¹ / ₂ "	4 ³ / ₁₆ "	1 ¹ / ₂ "	2 ¹ / ₃₂ "	2 ⁵ / ₃₂ "	15,000	5
 2073138R	0-57 Right	1 ⁷ / ₈ "	1 ¹⁵ / ₁₆ "	1 ¹ / ₈ "	3 ³ / ₆₄ "	3 ³ / ₆₄ "	10,000	1.75
 2073138L	0-57 Left	1 ⁷ / ₈ "	1 ¹⁵ / ₁₆ "	1 ¹ / ₈ "	3 ³ / ₆₄ "	3 ³ / ₆₄ "	10,000	1.75




0-53 Left

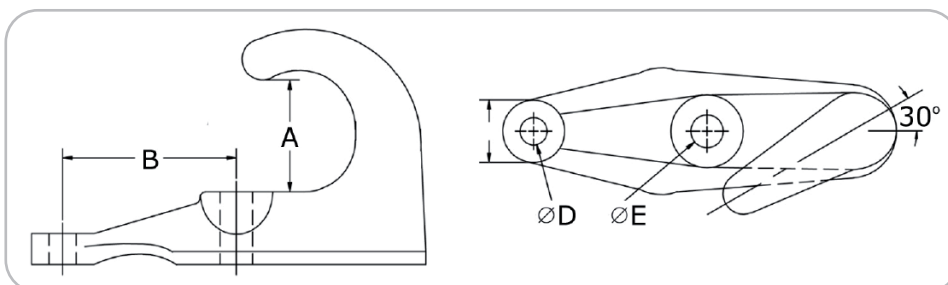

Safety Chain Hanger

- Heat treated for maximum strength
- Weldable

Part #	Description	MBS	Wt.
2329115	Safety Chain Hanger	100,000	10

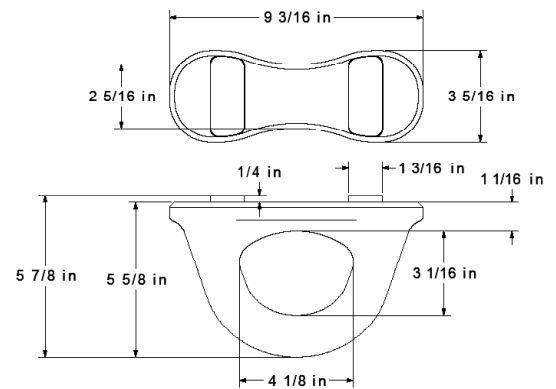


Safety Chain Retainer

- Weld on

Part #	Description and Chain Size	M.B.S.	Wt.
2322516	5/16" Safety Chain Retainer	12,000	.75
2318380	3/8" Safety Chain Retainer	25,000-	1
2322012	1/2" Safety Chain Retainer	32,000	1.5



Part #	A	B	C	D	E	F	G
2322516	7/8"	3/8"	1/2"	1-1/4"	2"	3/4"	3/8"
2318380	1"	1/2"	9/16"	1-5/16"	2-5/16"	3/4"	7/16"
2322012	1-1/8"	9/16"	11/16"	1-9/16"	2-5/16"	7/8"	5/8"


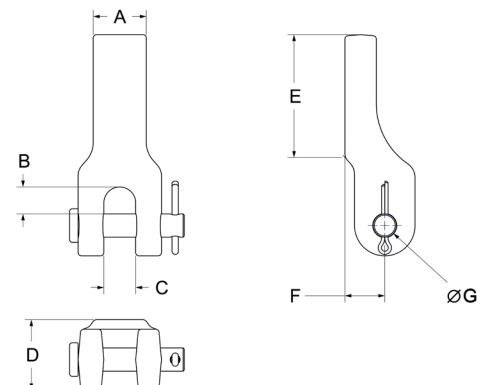


Forged D-Rings


All D-Ring Clips are weldable. All D-Rings and clips can be forged in Canton, Ohio-if this is desired please note on order. This is subject to different lead times and prices.

Part #	Model	Dimensions			Clip Style	Max. Capacity		Wt.
		A	B	C		S.W.L.	M.B.S.	
2330226	3/8" D-Ring	3/8"	2 5/8"	2"	A	3,000	-	0.5
2327218	1/2" D-Ring "A Clip"	1/2"	2 1/4"	2 1/2"	A	4,000	12,000	1
2327219*	1/2" D-Ring "B Clip"	1/2"	2 1/4"	2 1/2"	B	4,000	12,000	1
2328220	5/8" D-Ring	5/8"	3"	3"	A or B	6,000	19,000	2
 2022167	5/8" D-Ring	5/8"	2 3/4"	3 1/2"	A or B	6,000	19,000	2.25
2022168	3/4" D-Ring	3/4"	3"	3"	A	9,000	27,000	4.25
2329221	1" D-Ring	1"	3"	3"	A or B	15,000	47,000	4.5
2330222	1" D-Ring	1"	3"	4"	A or B	15,000	47,000	5

*B-Clip for 1/2" D-Ring has two 1/2" square holes for mounting.

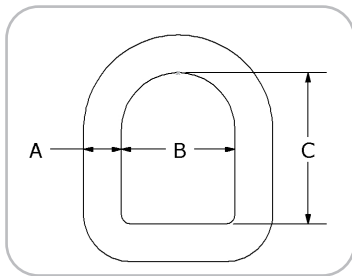

5/8 & 1" B-Clip



1/2" B-Clip



Standard A-Clip



2328220

50° Bent D-Ring

Part #	Model	Max. Capacity		Clip Style	Wt.
		S.W.L.	M.B.S.		
2330223	1" 5"x6" D-Ring	15,000	47,000	A or B	5



Swivel D-Ring

Part #	Description	Max. Capacity		Wt.
		S.W.L.	M.B.S.	
 2330229D	Bent D-Ring and Assembly	15,000	-	8
 2330229	Assembly Only NO D-RING	15,000	-	4



2330229D

Please read carefully to avoid injury.

For all products: To prevent injury or vertical damage, the mounting location must be at least capable of supporting 15% more than the maximum amount to be pulled.

Installation: Consult Department of Transportation regulations for procedure.

D-RINGS ARE NOT APPROVED FOR OVERHEAD LIFTING

SAFE WORK LOAD LIMIT (S.W.L.) – The maximum load in pounds which should ever be applied. Working load limit applies to a new product and assumes that the load is applied with even tension.


MAXIMUM BREAK STRENGTH (M.B.S.)– The maximum force in pounds at which the product, in the condition it leaves the factory, has been found by testing to break. This is for acceptance purposes only and the SAFE WORK LOAD LIMIT is still the greatest load that should ever be applied

Tab Lock Snapper Pins

- Zinc plated to reduce corrosion

Lock style provides easy leverage point for removal and installation.

Part #	Dimensions		
	A	B	C
2814200	1/4"	1 3/4"	1.625"
2814400	1/4"	2 1/2"	1.800"
2814600	5/16"	1 3/4"	1.562"
2814800	5/16"	2 1/2"	1.810"
2815000	3/8"	1 3/4"	1.562"
2815200	3/8"	2 1/2"	1.700"


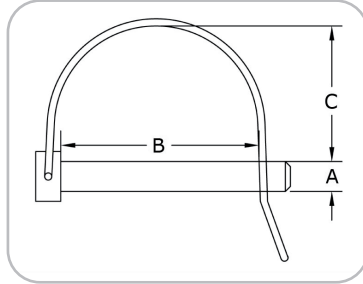


Snapper Pins

- Zinc plated to reduce corrosion

Part #	Dimensions		
	A	B	C
2312801	1/4"	1 3/4"	1 1/2"
2312802	5/16"	2 1/4"	1 5/8"
2312803	3/8"	1 1/4"	1 1/2"
2312804	3/8"	2"	1 1/2"
2312805	7/16"	1 3/4"	1 1/2"
2312807	1/4"	2 3/8"	1 3/4"
2312808	1/4"	3"	1 1/2"
2312809	1/4"	3 1/2"	1 1/2"


Part #	Dimensions		
	A	B	C
2312810	5/16"	3"	1.93"
2312811	1/4"	1.81"	1 1/2"
2312813	5/16"	2.59"	1 5/8"
2312814	3/8"	2.34"	1 1/2"
2312815	1/4"	2 1/2"	1 3/4"
2312816	1/4"	3"	1 1/2"
2312817	3/8"	3 1/2"	1 3/4"

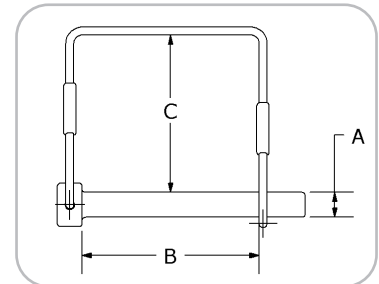

Stake Pocket D-Ring

Stake Pocket D-Ring fits easily in the stake pocket for trailers, and provides an easy way to secure your load. Complete with 1/2" D-Ring.

Part #	Description	Max. Capacity		Wt.
		S.W.L.	M.B.S.	
2331267	Stake-Pocket D-Ring	4,000	12,000	
 223107	Stake-Pocket Spare Tire Mount			

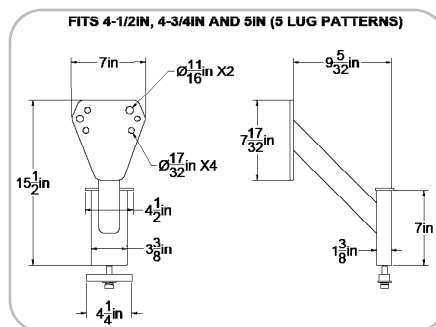

Detent Hitch Pins

Part #	Description	Usable Length	Wt.
1213000	3/8" Detent Hitch Pin	4"	1




DTHP3840

Standard Hitch Pins

- Feature a swivel handle
- Zinc plated to reduce corrosion

Part #	Dimensions	
	Pin Dia. (A)	Usable Length (B)
HP12000	1/2"	3 1/2"
HP12414	1/2"	4 1/4"
HP58412	5/8"	4 1/2"
HP58600	5/8"	6"
HP58625	5/8"	6 1/4"
HP34425	3/4"	4 1/4"
HP34412	3/4"	4 1/2"
HP34600	3/4"	6"
HP34625	3/4"	6 1/4"
HP78625	7/8"	6 1/4"
HP10600	1"	6"
HP10625	1"	6 1/4"

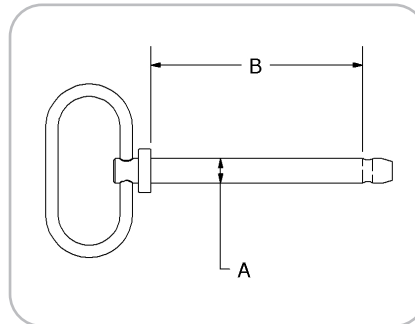


Bracket Mount Jacks

- Comes with a grease fitting and includes the male mounting mate
- Black powder coated to reduce corrosion

Weld-on L-bend swivel bracket with retaining ring. Assembled with 1/2" diameter pin and rectangular foot.

Part #	Description	Travel	Dimensions			Max Capacity	Wt.
			Retracted (A)	Extended (B)	Clearance (C)		
WF201102	Sidewind	15"	14 1/2"	29 1/2"	10"	2,000	16

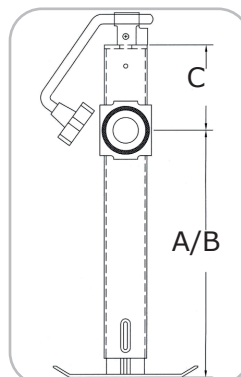

Square Direct Mount Jacks

- Have a drop leg
- Dramatically increases side load strength
- Black powder coated to reduce corrosion
- Zinc plated foot

Part #	Model	Dimensions				Max Capacity		Wt.
		Travel	Retracted	Extended	Add'l Drop	Lift	Support	
WF392722	Square Topwind	15"	21½"	50"	13½"	7,000	8,000	24

Square Direct Mount Jacks Replacement Parts

Part #	Description
722101	Foot for 7K Jacks
722102	Hitch Pin and Spring Clip for Jack Foot



Heavy Duty Square Mount Jacks

- Black powder coated to reduce corrosion
 - Additional drop leg is 5 position adjustable
 - Heat treated inner gears ensure increased strength and durability
- Available with or without a return spring and with a handle.

Jacks WITH Handle

Part #	Model	Return Spring	Dimensions				Capacity		Wt.
			Travel	Retracted	Extended	Add'l Drop	Lift	Support	
WF385822	Square Sidewind Side Pull	Yes	15"	24"	52"	15"	10,000	12,000	58
WF385215	Square Sidewind Front Pull	Yes	15"	24"	52"	15"	10,000	12,000	58
WF335037	Square Sidewind Side Pull	No	15"	24"	52"	15"	10,000	12,000	58
WF335010	Square Sidewind Front Pull	No	15"	24"	52"	15"	10,000	12,000	58

Square Mount Jacks Replacement Parts

Part #	Description
822100	Handle for Jack



10" Outrigger


- Designed to lock in place
- Complete with brackets

Outrigger capacity is based on recommended spacing of 18" apart with a minimum of 10 outriggers per side.

Part #	Model	Max Capacity		Wt.
		per Outrigger	as a Group	
 2382152A	10" Forged Outrigger	6,000	55,000	12



2382152A

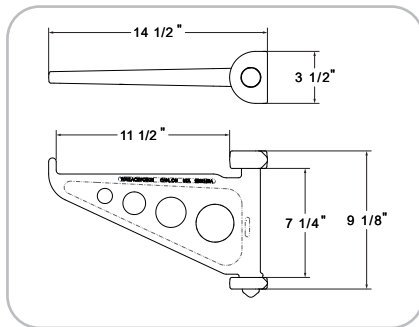

2382152A

Outrigger

Outrigger capacity is based on recommended spacing of 18" apart with a minimum of 10 outriggers per side.




Part #	Description	A	Max Capacity		Wt.
			per Outrigger	as a Group	
 2395163	Forged Outrigger Only	8 3/4"	5,000	40,000	9
 2395162	Bracket for 2395163 Outrigger	-	5,000	40,000	4.25
 2382153	Forged Outrigger Only	7"	6,000	40,000	8
 2382154A	Bracket for 2382153 Outrigger	-	6,000	40,000	3.75
2382150L	Removable Bracket for 7" Outrigger Accepts Forged Outrigger (Left)		6,000	40,000	3.75
2382150R	Removable Bracket for 7" Outrigger Accepts Forged Outrigger (Right)	-	6,000	40,000	3.75



2395163 & 2395162



2382153 and 2382150 (R/L)

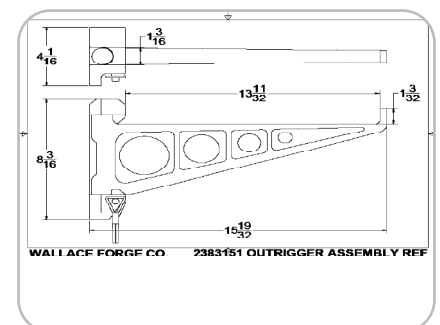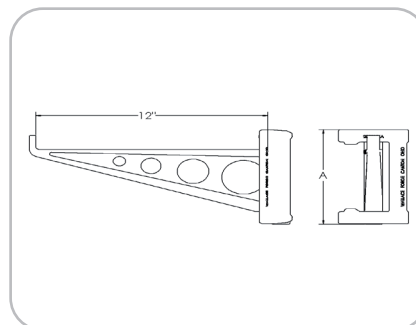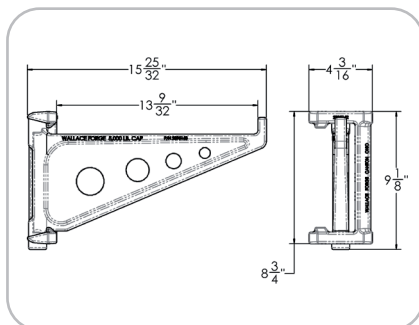

Floor Clip

Designed to secure floor boards on various trailers. Plated to reduce corrosion. Designed for 3/8" carriage bolts.


Part #	Model	Wt
2385153-G	Floor Clip	.25



WF601 Lashing Ring

This lashing ring requires 3" diameter mounting hole in 3/8" material or thicker.


Part #	Model	Finish	Max Capacity	Wt.
2383156	WF-601	Zinc	1,000	0.25

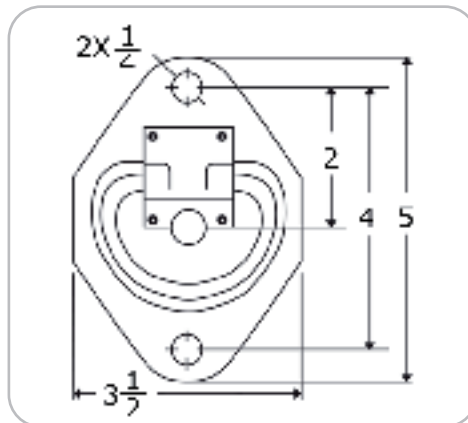

WF701 Lashing Ring

This lashing ring requires a 3" diameter mounting hole in 1/4" material or thicker.


Part #	Model	Finish	Max Capacity	Wt.
2383155FL	Flush Mount 701	Zinc	1,200	0.5

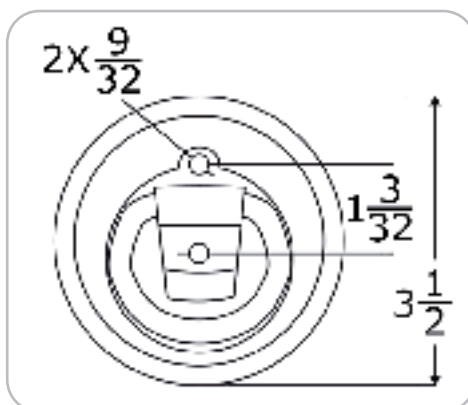

WF5572 Lashing Ring

This lashing ring thickness has a diameter of $\frac{7}{16}$ ".


Part #	Finish	Max Capacity	Wt.
2383150	Zinc	3,500	1

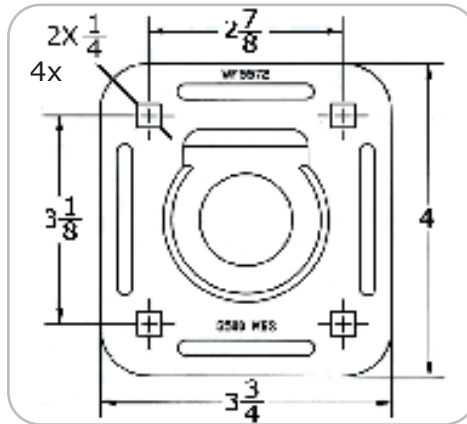

WF55801 Lashing Ring

This lashing ring thickness has a diameter of $\frac{7}{16}$ ".


Part #	Finish	Max Cap.	Wt.
2383154	Zinc	6,000	1.25
2383154B	Zinc Plated Backing Plate		1

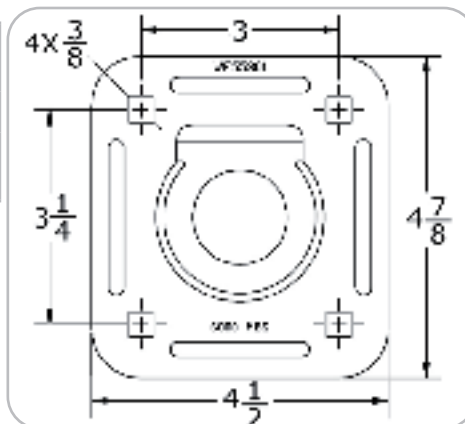

Rotating Lashing Ring

- Fabricated recessed ring rotates 360°
- Designed to be bolted to the floor or welded to steel cross members.

Part #	Model	Finish	Max Capacity	Wt.
2383153	WF 901	Zinc	6,000	2.5
2383141	Heavy Duty 901	Zinc	8,000	4.5

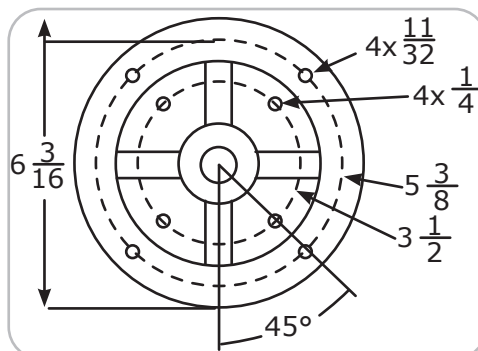

2383153



2383153



2383141

Linch Pins

- Weldable
- Zinc plated to reduce corrosion



Part #	Dimensions		Wt.	Part #	Dimensions		Wt.
	Pin Dia. (A)	Usable Length (B)			Pin Dia. (A)	Usable Length (B)	
1201000	3/16"	1 3/8"	0.25	1207000	7/16"	1 3/4"	0.25
1202000	1/4"	1 3/4"	0.25	1208000	7/16"	2"	0.25
1203000	5/16"	1 3/4"	0.25	1209000	7/16"	1 3/8"	0.25
1204000	.354"	1 3/4"	0.25	1210000*	7/16"	1 3/4"	0.25
1205000	3/8"	1 3/4"	0.25	1211000*	1/4"	1 3/4"	0.25
1206000	.413"	1 3/4"	0.25	1212000*	5/16"	1 3/4"	0.25

*Part # 1210000, 1211000, 1212000 have a heavier snap ring.



Stabilizer Pin


Part #	Wt.
SP07838	1



Triangle Rope Ring

- 3/8" bolt hole
- 1/4" ring diameter


Part #	Model	Finish	Max Capacity	Wt.
2330225	Triangle Rope Ring	Black Powder Coated	600	.25



1/4" Rope Ring

- 1/4" bolt holes spaced 1 3/8" part
- 1/4" ring diameter


Part #	Model	Finish	Max Capacity	Wt.
2330224	1/4" Rope Ring	White Zinc	700	2



Spring Latches

- Weldable
- Zinc plated to reduce corrosion


Part #	Description	Keeper	Wt.
2094180	½" Spring Latch	No	1
2094183	½" Spring Latch	Yes	1.5
2094185	½" Keeper Only	-	0.5
2094179	¾" Spring Latch	No	2.5
2094182	¾" Spring Latch	Yes	3
2094187	¾" Keeper Only	-	0.5

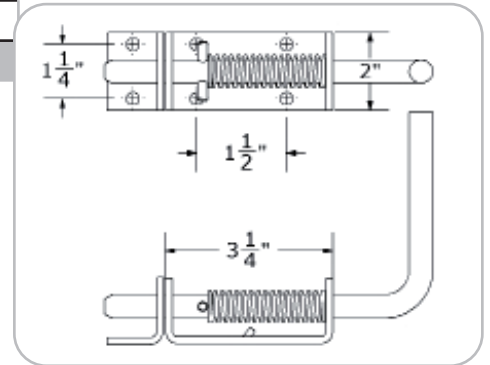

Weldable Spring Latch


Wallace Forge's boxed in spring latch features a zinc plated swivel handle for easy opening and closing. The casing of the latch is all steel, and 100% weldable. Slots in casing allow the latch to be locked open.

Part #	A	Wt.
2094184	2"	0.75
2094192	3"	1

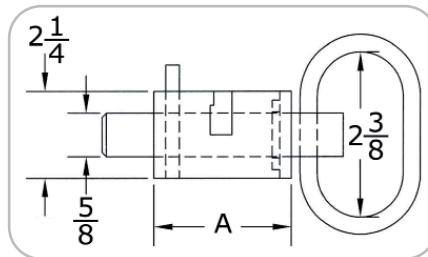



7/16" Spring Latches

Part #	Description	Material		# of Posts	Wt.
		Base	Pull Handle		
PN2094189	7/16" Spring Latch	Stainless	Stainless	2	1
2443011	7/16" Spring Latch	Aluminum	Steel	2	2





7/16" Latch

Part #	Description	Material		# of Posts	Wt.
		Base	Pull Handle		
2442911	7/16" Spring Latch	Aluminum	Steel	None	2
2094188	7/16" Spring Latch	Steel	Steel	None	1.5

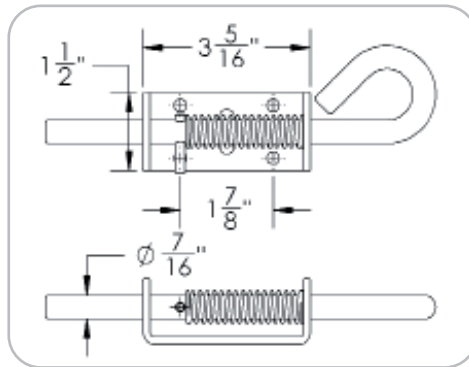

1/2" Stainless Steel Latch


Part #	Description	Material		# of Posts	Wt.
		Base	Pull Handle		
2094193	1/2" Spring Latch	Stainless	Stainless	None	2

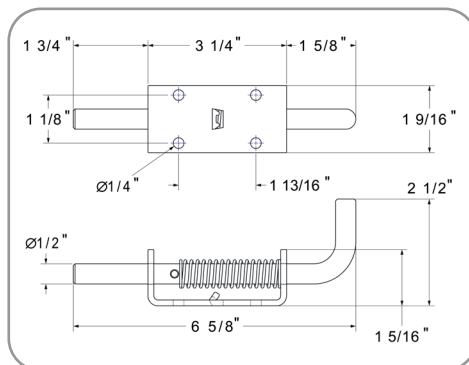

3/4" Pin Tipper Latch

Designed with the same mounting bracket as the 3/4" Spring. The 3/4" Pin tipper latch is easily opened and closed, and does not have tapered, or roll pin when can be a shear point, when significantly impacted.


Part #	Pin Diameter	Wt.
2094162	3/4"	3

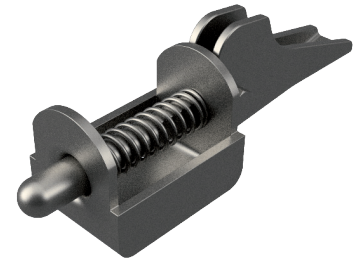


Tipper Latch

Tipper latches are typically used for utility, snowmobile, and boat trailers. Tipper latches are spring loaded for an easy release. Wallace Forge's weldable zinc plated tipper latch features two 3/8" bolt holes for mounting weighs.

Part #	Wt.
2457000	1.25
2457750	1.25




2457000



2457750

Dimensions the same on each tipper latch, except for different handle orientation

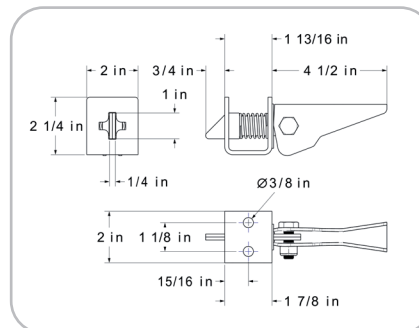


Truck Bed Tie Down Assembly

- Made with 3/8" Grade 70 Chain
- Sits flush with truck floor bed when not in use
- Easily opened with the pull of a finger

Hole in truck bed should be a minimum of 2 3/8" diameter.

Part #	Model	Max Capacity	Wt.
 2024169	Tie Down	5,400	4

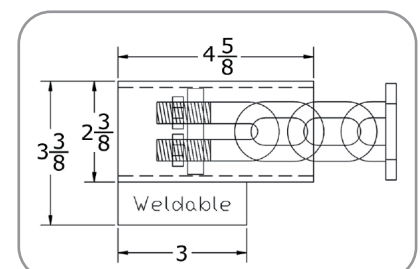

WALLACE FORGE WARRANTY POLICY

Wallace Forge Company warrants repair or replacement of any products of its manufacture, at its option. Upon delivery to its factory, which with one year after date of sale by Wallace's customer, is proved to the satisfaction of Wallace Forge Co. defective at the time of said sales; provided that all products claimed defective are returned properly identified to Wallace Forge Company.

Not covered by this warranty are:

- 1.) Products which have been altered, changed, or repaired by someone other than the Wallace Forge Co.
- 2.) Defects, damages or deterioration due to normal use, exposure or wear and tear.
- 3.) Damages or defects due to misuse, alteration, negligence, or accident.

This warrant to repair or replace the defective products is the only warranty express, implied, or statutory, upon these products manufactured by Wallace Forge Company Inc. and the liability of Wallace Forge Company Inc. is hereby expressly limited to the repair or replacement of defective products. All other damages and warranties are hereby expressly waived by the purchaser.

TO AVOID INJURY – PLEASE READ CAREFULLY

1. Follow D.O.T. regulations for installation.
2. Do not modify or add to product.
3. Use grade 8 bolts for mounting with proper torque.
4. Inspect before operating for wear, deformation, damaged or missing parts and secure mounting.
5. FOR ALL PRODUCTS: To prevent personal injury or damage, the mounting location must be capable of supporting 15% more than the maximum amount to be pulled.
6. Do not exceed maximum capacity of product
7. Use safety chains of proper capacity in conjunction with all towing devices at all times.
8. Secure latch in closed position with safety pin inserted. Do not operate without safety pin in place, on pintle hooks and couplers.
9. Use pintle hook with proper lunette.
10. Products in our catalog are NOT for lifting.

Nothing herein expresses or implies any product warranty.

Wallace Forge Company is not liable if products are welded or modified.

Specifications, dimensions, or designs may be changed or improved at any time without prior notice. Consult D.O.T. regulations for INSTALLATION instructions, and operating instructions.

WARNING: This equipment should not be used or maintained in a haphazard manner. Inspect for proper installation. Inspect before use for wear and deformation requiring replacement. Replace worn parts with Wallace Forge Company replacement parts. Clean and lubricate properly. Use proper bolts for mounting with proper torque.



3700 Georgetown St. N.E.
Canton, Ohio 44704

Toll Free: (800) 328 1203
Phone: (330) 488 1203 **Fax:** (330) 488 1217
Website: www.WallaceForge.com
Email: Sales@WallaceForge.com